

# POWER TOOLS 2022/23

Handheld Power Tools  
Stationary Power Tools





## POWER X-CHANGE

<b>Power X-Change</b>	<b>4</b>		
Cordless Drill	8	Cordless Multi Sander	21
Cordless Impact Drills	8	Cordless Rotating Sander	21
Cordless Impact Driver	9	Cordless Polishing/Sanding Machine	22
Cordless Impact Wrenches	9	Cordless Car Polishing Machine	22
Cordless Drywall Screwdriver	10	Cordless Nailer	23
Cordless Impact Drill	10	Cordless Sealing Gun	23
Cordless Rotary Hammers	11	Cordless Paint Spray System	24
Cordless Paint/Mortar Mixer	12	Cordless Hot Glue Gun	24
Cordless Angle Grinders	13	Cordless Hot Air Gun	24
Cordless Biscuit Jointer	15	Cordless Blower	25
Cordless Router/Palm Router	15	USB Battery Adapter	25
Cordless Planer	16	Accessories – Case	25
Cordless Jigsaw	16	System Case E-Case	26
Cordless Circular Saws	17	Cordless Wet and Dry Vacuum Cleaners	27
Cordless Mini Circular Saw	17	Cordless Handheld Vacuum Cleaner	27
Cordless All Purpose Saw	18	Cordless Stick Vac Cleaner	28
Cordless Sliding Mitre Saw	18	3-in-1 Cordless Compressor	29
Cordless Table Saw	18	Cordless Compressor	29
Cordless Band Saw	19	Accessories – Batteries	30
Cordless Multifunctional Tool	19	Accessories – Starter Kits	30
Cordless Band Sander	20	Accessories – Power X-Car Charger	30
Cordless Orbital Sander	20	Power X-Change – The Battery Guide	31



## HANDHELD POWER TOOLS

<b>Screwing</b>	<b>35</b>	<b>Grinding / Sanding</b>	<b>44</b>
Drywall Screwdriver	35	Grinding and Engraving Tool	44
<b>Drilling + Mixing</b>	<b>35</b>	Orbital Sanders	45
Impact Drills	35	Band Sander	45
Rotary Hammer 5 kg class	36	Multi Sander	46
Rotary Hammers 2 kg class	36	Rotating Sander	46
Demolition Hammers	37	<b>More Power Tools</b>	<b>47</b>
<b>Cutting</b>	<b>37</b>	Electric Paint Spray System	47
Angle Grinder 230 mm	37	Hot Air Gun	47
Angle Grinder 125 mm	38	<b>Laser/Detector Technology</b>	<b>48</b>
Angle Grinders 115 mm	38	Cross Laser Level	48
<b>Milling + Planing</b>	<b>39</b>	Laser Levelling	48
Wall Liner	39	Laser Distance Meter	49
Biscuit Jointer	40	Digital Detector	49
Router	40		
Planer	41		
<b>Sawing</b>	<b>41</b>		
Jigsaw	41		
Circular Saws	42		
Plunge Cut Saw	43		
Mini Circular Saw	43		
All Purpose Saw	44		





## STATIONARY TOOLS

<b>Woodworking</b>	<b>51</b>
Sliding Mitre Saws	51
Mitre Saws	52
Table Saws with Base Frame	52
Stationary Planer	53
Scroll Saw	53
Band Saws	54
Woodworking Lathe	54
Vacuum Extraction System	55
<b>Cleaning</b>	<b>55</b>
Wet and Dry Vacuum Cleaner	55
<b>Compressed Air Technology</b>	<b>56</b>
Silent Air Compressor	56
Air Tools	56
Oil-lubricated Compressor	56
Oil-free Compressors	57

<b>Tile Cutting</b>	<b>58</b>
Tile Cutting Machines	58
<b>Stationary Grinding</b>	<b>59</b>
Bench Grinders	59
Belt-Disc Sanders	60
Stationary Grinder	60
<b>Metalworking</b>	<b>61</b>
Metal Cutting Saw	61
<b>Stationary Drilling</b>	<b>61</b>
Bench Drills	61
<b>Hoisting</b>	<b>62</b>
Electric Hoists	62
Chain Hoist	62



## CHARGING SYSTEM // CAR ACCESSORIES

Analog Battery Charger	63
Jump Start – Power Bank	63

Car Air Compressor	63
--------------------	----



## ACCESSORIES

Accessories – Handheld Power Tools	64
------------------------------------	----

Accessories – Stationary Tools	66
--------------------------------	----





# Einhell

CORDLESS EXCELLENCE.



**1 BATTERY.**

**FOR MORE THAN 250 TOOLS.**





**ONLY FROM EINHELL.**





**CORDLESS FREEDOM.  
FOR TOOL AND GARDEN.**

**At last – no more too short or severed cables.**

When you have no longer to worry about extension cables that are too short or sufficient sockets. When the device comes to the project instead of the other way round. When you simply insert the battery and are ready to go, whether it is a lawn mower, garden pump, rotary hammer or wet and dry vacuum cleaner. Than that is the feeling of cordless freedom.



**LATEST TECHNOLOGY.  
PROVEN QUALITY.**

**So you can enjoy using your machine for a very long time.**

The Power X-Change batteries are the centerpiece of the platform. That is why we use only the best components such as high-performance Li-Ion cells and our intelligent ABS battery electronics in the batteries. This makes our PXC battery one of the safest in the industry and ensures efficiency, reliability and durability. Stiftung Warentest (11/2020 issue) confirmed its quality in a comparison test with eight batteries from eight different battery platforms. The 2.0 Ah battery from the Power X-Change battery system from Einhell beat off stiff competition to emerge as test winner.



**POWERFUL MACHINES.  
LONG-LASTING BATTERIES.**

**No matter how large your project – Power X-Change won't let you down.**

Less power? No way! As a battery system for real enablers, our cordless machines offer up to 2700 Watt of battery power and 6 Ah of capacity, making them easily a match for corded machines! Whether you just want to hang a shelf or drill through a solid concrete wall, with Power X-Change you are equipped to meet any challenge with power and endurance.



**1 BATTERY. 1000 POSSIBILITIES.  
FOR DIY ENTHUSIASTS AND HOBBY GARDENERS.**

**Just as versatile as you: Battery power for every situation.**

Power X-Change is the first rechargeable battery system that provides hobby gardeners and DIY enthusiasts alike with an unrivaled selection of cordless tools. The PXC family already contains over 250 devices – and the number is constantly rising. Thanks to the versatile Power X-Change system, for instance, the electric kick scooter from GOVECS is "powered by Power X-Change".





### ACTIVE BATTERY MANAGEMENT SYSTEM. INTELLIGENT ELECTRONIC CONTROL SYSTEM.

The computer-assisted Active Battery Management System permanently monitors and controls all the safety-related processes of the electrical components and associated hardware. This results in a whole range of advantages:

- MAXIMISED RUNNING TIMES
- OPTIMISED TOOL POWER
- LONGER BATTERY SERVICE LIFE
- INCREASED SAFETY



### TWIN-PACK® TECHNOLOGY. 18 V + 18 V = 36 V.

If a device needs more power than provided by a single 18 V rechargeable battery, we simply add a second battery so we generate 18 V + 18 V = 36 V. We call that Twin-Pack® Technology.


If the voltage (V) gets doubled, the power (W) gets doubled, too. Double Twin-Pack Technology in turn makes it possible to work for even longer still without the nuisance of recharging. In this case, four rechargeable batteries are used. When the power of the first two batteries finally runs out, the system automatically switches over to the two additional batteries.



### POWER X-CHANGE PLUS. THE PLUS IN POWER.

Rechargeable batteries vary not just in terms of running time and weight. What is also critically important is the power that they provide. Power X-Change PLUS Technology makes more power available from the same number of cells, so that you can work with plenty of power even on challenging applications as well.

If, for example, you want to use your angle grinder for cutting work, the running time (see Ah rating) is generally not critical. Sufficient power, on the other hand, is. A car is a useful comparison. Uphill or when overtaking, more power, in other words more hp respectively kW, is needed.

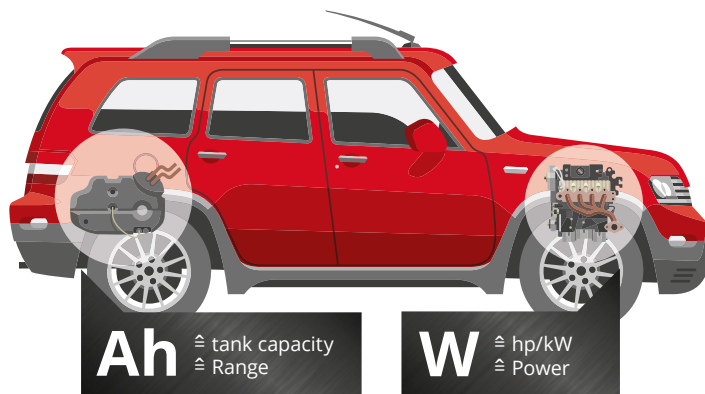

### BRUSHLESS ENERGY – MORE EFFICIENT WORK.

Various Power X-Change devices are equipped with brushless motors. They offer significant advantages compared to carbon brush motors:

- MORE POWER
- LONGER RUNNING TIMES
- LONGER SERVICE LIFE
- MORE COMPACT DESIGN
- MAINTENANCE-FREE



**25%**  
+ more power\*

**50%**  
+ more operating time\*

**100%**  
+ more service life\*

\* Approximate values in comparison to conventional carbon brush motors

## CORDLESS DRILL 18 V



	<b>TE-CD 18/45 3X-Li +22 (1x 2.0 Ah)</b> <b>EXPERT</b> <span style="float: right;"><b>NEW</b></span>
PXC battery voltage / capacity	18 V / 2.0 Ah
Charging time	40 min
Idle speed	0 - 450 / 0 - 1600 min <sup>-1</sup>
Torque (hard)	45 Nm
Torque settings	20+1
Drill chuck	13 mm
Product weight	1.5 kg (incl. battery)
Brushless motor	-
Metal drill chuck	-
Metal gear box	•
Number of removable attachments	3
LED	•
Belt clip	•
Accessories	22-piece in bit box
Number of batteries / number of chargers	1 / 1x Power X-Charger 3 A
Additional handle	-
Packaging	E-Box Basic
Article number	45.139.90



## CORDLESS IMPACT DRILLS 18 V



	<b>TE-CD 18/48 Li-i - Solo</b> <b>EXPERT</b>	<b>TE-CD 18 Li-i Brushless - Solo</b> <b>EXPERT PLUS</b>
PXC battery voltage / capacity	18 V / -	18 V / -
Charging time	-	-
Idle speed	0 - 400 / 0 - 1500 min <sup>-1</sup>	0 - 500 / 0 - 1800 min <sup>-1</sup>
Blow rate	0 - 6400 / 0 - 24000 min <sup>-1</sup>	0 - 8000 / 0 - 28800 min <sup>-1</sup>
Torque (hard)	48 Nm	60 Nm
Torque settings	21+1+1	20+1+1
Drill chuck	13 mm	13 mm
Product weight	1.3 kg (excl. battery)	1.3 kg (excl. battery)
Brushless motor	-	•
Metal drill chuck	•	•
Metal gear box	•	•
Quick stop	-	•
LED	•	•
Belt clip	•	•
Number of batteries / number of chargers	0 / 0	0 / 0
Additional handle	•	•
Accessories	-	Colour box
Packaging	Colour box	
Article number	45.139.26	45.138.60





## CORDLESS IMPACT DRIVER 18 V

BRUSHLESS  
ENERGY  
Einhell



**180 Nm  
HIGH  
POWER**

	TP-CI 18 Li Brushless - Solo <b>PROFESSIONAL</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed	0 - 2900 min <sup>-1</sup>
Torque (hard)	180 Nm
Number of torque settings	1
Bit mount	Internal hexagon 6.35 mm (1/4")
Product weight	1.1 kg (excl. battery)
Brushless motor	•
LED	•
Metal gear box	•
Electronic speed control	•
Belt clip	•
Number of batteries / number of chargers	0 / 0
Accessories	-
Packaging	Colour box
Article number	45.100.30



4 006825 613971

## CORDLESS IMPACT WRENCHES 18 V

BRUSHLESS  
ENERGY  
Einhell

**400 Nm /  
215 Nm  
HIGH  
POWER**



	IMPAXXO 18/400 <b>PROFESSIONAL</b>	<b>NEW</b>	TE-CW 18 Li Brushless - Solo <b>EXPERT PLUS</b>
PXC battery voltage / capacity	18 V / -		18 V / -
Charging time	-		-
Idle speed	0 - 1000 min <sup>-1</sup> / 0 - 1500 min <sup>-1</sup> / 0 - 2100 min <sup>-1</sup>		0 - 2900 min <sup>-1</sup>
Torque (hard)	400 Nm		215 Nm
Number of torque settings	3		1
Bit mount	12.5 mm (1/2") external square drive mount		12.5 mm (1/2") external square drive mount
Product weight	2.0 kg (excl. battery)		1.1 kg (excl. battery)
Brushless motor	•		•
LED	•		•
Metal gear box	•		•
Electronic speed control	•		•
Belt clip	•		•
Number of batteries / number of chargers	0 / 0		0 / 0
Accessories	Bit adapter, 3-piece nut set		Bit adapter
Packaging	Colour box		Colour box
Article number	45.100.70		45.100.40



4 006825 657456



4 006825 616323

## CORDLESS DRYWALL SCREWDRIVER 18 V



	<b>TE-DY 18 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Idle speed	0 - 4000 min <sup>-1</sup>
Torque (soft)	6 Nm
Bit mount	Internal hexagon 6.35 mm (1/4")
Product weight	0.9 kg (excl. battery)
Adjustment without tools (depth)	•
Speed control electronics	•
Continuous operation setting	•
Soft grip	•
LED	•
Belt clip	•
Number of batteries / number of chargers	0 / 0
Accessories	1x bit type PH2 S2
Packaging	E-Box
Article number	42.599.80



## CORDLESS IMPACT DRILL



	<b>TC-ID 18 Li - Solo</b> <b>CLASSIC</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed / blow rate	0 - 2600 min <sup>-1</sup> / 0 - 41600 min <sup>-1</sup>
Drilling capacity, wood	25 mm
Drilling capacity, cement	13 mm
Drilling capacity, steel	10 mm
Drill chuck	13 mm
Product weight	1.6 kg (excl. battery)
Speed control electronics	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Additional handle	•
Metal depth stop	•
Packaging	Colour box
Article number	45.139.60





# CORDLESS ROTARY HAMMERS

Cordless Rotary Hammer  
HEROCCO 36/28



- **ANTI-VIBRATION**  
Comfortable to work with thanks to vibration-absorbing main handle
- **ELECTRONIC SPEED CONTROL**  
The right speed for every application
- **4 FUNCTIONS**  
Drilling, screwing, impact drilling, chiselling with fixation
- **PNEUMATIC HAMMER MECHANISM**  
Only slight pressure needs to be applied to achieve high impact force
- **POWER X-CHANGE LI ION BATTERY / TWIN-PACK TECHNOLOGY**  
The rechargeable battery can be used in all the devices from the Power X-Change family – using 2x 18 V Power X-Change rechargeable batteries delivers even more power
- **INTEGRATED LED**  
Well illuminated work area even in poor lighting conditions

## CORDLESS ROTARY HAMMER 36 V



**BRUSHLESS MOTOR**  
More power and prolonged operation



	<b>HEROCCO 36/28</b> <b>PROFESSIONAL</b>
PXC battery voltage / capacity	2x 18 V / -
Charging time	-
Idle speed / blow rate / impact force	0 - 1100 min-1 / 0 - 5300 min-1 / 3.2 J
Drilling capacity, cement	28 mm
Drill chuck	SDS-plus
Product weight	3.4 kg (excl. battery)
Brushless motor	•
Speed control electronics	•
Vibration-cushioned main handle	•
Overload safety stop	•
Pneumatic impact mechanism	•
Functions	4
LED	•
Automatic lock	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Additional handle	•
Metal depth stop	•
Accessories	-
Packaging	E-Box
Article number	45.139.50



## CORDLESS ROTARY HAMMERS 18 V

**INCL. BIT ADAPTER**



	<b>HEROCOCCO 18/20 PROFESSIONAL</b>	<b>TE-HD 18 Li - Solo EXPERT PLUS</b>
PXC battery voltage / capacity	18 V / -	18 V / -
Charging time	-	-
Idle speed / blow rate / impact force	0 - 1200 min <sup>-1</sup> / 0 - 5500 min <sup>-1</sup> / 2.2 J	0 - 1100 min <sup>-1</sup> / 0 - 5700 min <sup>-1</sup> / 1.2 J
Drilling capacity, cement	20 mm	12 mm
Drill chuck	SDS-plus	SDS-plus
Product weight	2.1 kg (excl. battery)	1.4 kg (excl. battery)
Brushless motor	•	-
Speed control electronics	•	•
Vibration-cushioned main handle	•	-
Overload safety stop	•	•
Pneumatic impact mechanism	•	•
Functions	4+1	3
LED	•	•
Automatic lock	•	•
Soft grip	•	•
Number of batteries / number of chargers	0 / 0	0 / 0
Additional handle	•	-
Metal depth stop	•	-
Accessories	1 magnetic bit adapter	1 magnetic bit adapter
Packaging	E-Box	Colour box
Article number	45.139.00	45.138.12



## CORDLESS PAINT/MORTAR MIXER

**LIGHT WEIGHT**



	<b>TE-MX 18 Li - Solo EXPERT</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed	0 - 620 min <sup>-1</sup>
Stirrer mount	M14
Product weight	1.9 kg (excl. stirrer)
Speed control electronics	•
Soft start	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Accessories	1 mortar stirrer (Ø 100 mm)
Packaging	Colour box
Article number	42.587.60





# CORDLESS ANGLE GRINDERS

## ANTI-VIBRATION FUNCTION

for low-vibration operation

## OVERLOAD CUT-OUT

Protects the high-quality components and ensures long operation

## SOFT START FUNCTION AND RESTART SAFEGUARD

Provide even more safety for the user

## SPINDLE LOCK

Easy and quick disc change

## SLIMLINE DESIGN AND SOFT GRIP SURFACES

for safe and comfortable operation

## TURNABLE MAIN HANDLE

High safety and better handling when cutting

## ADDITIONAL HANDLE

Can be fitted in 2 different positions – for both left-handed and right-handed users

## DISC GUARD WITH QUICK ADJUST FACILITY

Quick adjustment to the working position without any tools

## POWER X-CHANGE LITHIUM-ION BATTERY

The rechargeable battery can be used in all the devices from the Power X-Change family

## BRUSHLESS MOTOR

More power and prolonged operation



Cordless Angle Grinder  
AXXIO 36/230 Q



## LARGE CUTTING DEPTH OF UP TO 70 MM

for a wide range of applications

## CORDLESS ANGLE GRINDER 230 MM



	AXXIO 36/230 Q	NEW
PXC battery voltage / capacity	2x 18 V / -	
Charging time	-	
Idle speed	6300 min-1	
Wheel diameter	230 mm	
Max. cutting depth	70 mm	
Product weight	4.0 kg (excl. battery)	
Brushless motor	•	
Soft start	•	
Restart safeguard	•	
Overload cut-out	•	
Disc guard with quick adjust facility	•	
Spindle Lock	•	
Soft grip	•	
Additional handle	can be mounted in 2 positions	
Number of batteries / number of chargers	0 / 0	
Accessories	Quick fix nut	
Packaging	Colour box	
Article number	44.311.60	



## CORDLESS ANGLE GRINDER 125 MM

BRUSHLESS ENERGY



AXXIO 18/125	
PROFESSIONAL	
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed	8500 min <sup>-1</sup>
Wheel diameter	125 mm
Max. cutting depth	33 mm
Product weight	1.4 kg (excl. battery)
Brushless motor	•
Soft start	•
Restart safeguard	•
Overload cut-out	•
Disc guard with quick adjust facility	•
Spindle Lock	•
Soft grip	•
Additional handle	can be mounted in 2 positions
Number of batteries / number of chargers	0 / 0
Accessories	Face spanner
Packaging	Colour box
Article number	44.311.40



4 006825 630558

## CORDLESS ANGLE GRINDERS 115 MM

BRUSHLESS ENERGY



AXXIO 18/115 Q		TE-AG 18/115 Li - Solo	
PROFESSIONAL		EXPERT	
PXC battery voltage / capacity	18 V / -	PXC battery voltage / capacity	18 V / -
Charging time	-	Charging time	-
Idle speed	8500 min <sup>-1</sup>	Idle speed	8500 min <sup>-1</sup>
Wheel diameter	115 mm	Wheel diameter	115 mm
Max. cutting depth	28 mm	Max. cutting depth	28 mm
Product weight	1.2 kg (excl. battery)	Product weight	1.2 kg (excl. battery)
Brushless motor	•	Brushless motor	-
Soft start	•	Soft start	•
Restart safeguard	•	Restart safeguard	•
Overload cut-out	•	Overload cut-out	•
Disc guard with quick adjust facility	•	Disc guard with quick adjust facility	•
Spindle Lock	•	Spindle Lock	•
Soft grip	•	Soft grip	•
Additional handle	can be mounted in 2 positions	Additional handle	can be mounted in 3 positions
Number of batteries / number of chargers	0 / 0	Number of batteries / number of chargers	0 / 0
Accessories	Quick fix nut	Accessories	Face spanner
Packaging	Colour box	Packaging	Colour box
Article number	44.311.50	Article number	44.311.10



4 006825 642698



4 006825 602593

## CORDLESS BISCUIT JOINER



	<b>TE-BJ 18 Li - Solo</b>
	<b>EXPERT</b> <span style="float: right;"><b>NEW</b></span>
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed	6500 min-1
Max. cutting depth	20 mm
Tilt angle adjustment	90°
Channel cutter	Ø 100 x Ø 22 x 4 mm
Product weight	2.2 kg (excl. battery)
Infinitely adjustable angle setting	•
Infinitely adjustable height	•
Cutting depth quick-set adjustment	6-stufig
Spindle Lock	•
Dust extraction	•
Face spanner	•
Packaging	Colour box
Article number	43.506.30



## CORDLESS ROUTER/PALM ROUTER



	<b>TP-RO 18 Set Li Brushless - Solo</b>
	<b>PROFESSIONAL</b> <span style="float: right;"><b>NEW</b></span>
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed	10000 - 30000 min-1
Stroke height	40 mm / 35 mm
Max. form cutter	30 mm
Product weight	1.3 kg (palm router) / 2.4 kg (two-hand router) - each without a battery
Speed control electronics	•
Cutting depth fine adjustment	•
Chip shield	•
Spindle Lock	•
Soft grip	•
Dust extraction	•
Parallel stop	•
Compass point	•
Attachment	Palm router + two-hand attachment
Clamp diameter	6.35 mm (1/4") / 8 mm
Storage case	•
Packaging	Colour box
Article number	43.504.10





## CORDLESS PLANER



	<b>TE-PL 18/82 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed	15000 min <sup>-1</sup>
Planing width	82 mm
Chip depth	2 mm
Rebate depth	8 mm
Product weight	2.4 kg (excl. battery)
Soft grip	•
Automatic blade protector	•
Aluminium sole plates	•
V grooves	1
Chip ejection	on one side
Number of batteries / number of chargers	0 / 0
Parallel stop	•
Rebate depth stop	•
Planing blades (reversible blades)	1 pair TCT
Packaging	Colour box
Article number	43.454.00



## CORDLESS JIGSAW



	<b>TE-JS 18/80 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Stroke speed	0 - 2400 min <sup>-1</sup>
Cutting depth (wood/plastic/steel)	80 / 12 / 10 mm
Product weight	1.8 kg (excl. battery)
Universal blade holder	•
Pendulum action	4 settings
Cutting angle adjustment without tools	•
Blade change without tools	•
Vacuum cleaner connection	•
LED	•
Dust-blower function	•
Cutting line guide	•
Number of batteries / number of chargers	0 / 0
Accessories	Parallel stop, chip guard
Packaging	Colour box
Article number	43.212.00



## CORDLESS CIRCULAR SAWS



	<b>TP-CS 18/190 Li Brushless - Solo</b> <b>PROFESSIONAL</b>	<b>TE-CS 18/165-1 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -	18 V / -
Charging time	-	-
Idle speed	3800 min <sup>-1</sup>	4200 min <sup>-1</sup>
Saw blade	Ø 190 x Ø 20/30 mm	Ø 165 x Ø 20 mm
Cutting depth 90°	65 mm	54 mm
Cutting depth 45°	45 mm	35 mm
Product weight	3.2 kg (excl. battery)	2.6 kg (excl. battery)
Brushless motor	•	-
Adjustment without tools (depth/angle)	•	•
LED	•	•
Aluminium sawing table	•	•
Spindle Lock	•	•
Double-sided safety lock-off	•	•
Dust extraction device	•	•
Soft grip	•	•
Number of batteries / number of chargers	0 / 0	0 / 0
Accessories	Parallel stop	Parallel stop
Packaging	Colour box	Colour box
Article number	43.312.10	43.312.07



## CORDLESS MINI CIRCULAR SAW



	<b>TE-CS 18/89 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed	3500 min <sup>-1</sup>
Saw blade	Ø 89 x Ø 10 mm
Cutting depth 90°	28 mm
Product weight	1.8 kg (excl. battery)
Brushless motor	-
Adjustment without tools (depth)	•
Aluminium sawing table	•
Spindle Lock	•
Dust extraction device	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Accessories	2 saw blades (wood/plastic), parallel stop
Packaging	Colour box
Article number	43.311.00



## CORDLESS ALL PURPOSE SAW



	<b>TE-AP 18/22 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Stroke speed	0 - 2600 min <sup>-1</sup>
Stroke height	22 mm
Cutting depth (wood / steel)	100 / 6 mm
Saw blade thickness	0.6 - 1.6 mm
Product weight	1.6 kg (excl. battery)
Brushless motor	-
Blade change without tools	•
Soleplate adjustment without tools	•
Number of batteries / number of chargers	0 / 0
Accessories	1 saw blade (wood)
Packaging	Colour box
Article number	43.263.00



## CORDLESS SLIDING MITRE SAW



	<b>TE-SM 36/210 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	2x 18 V / -
Speed	3800 min <sup>-1</sup>
Saw blade	Ø 210 x Ø 30 mm
Number of teeth	40
Swivelling range	-47° to +47°
Mitre cut	0° to 45° to the left
Max. cutting capacity at 90°	310 x 65 mm
Product weight	12.6 kg (excl. battery)
Laser	•
LED light	•
Soft start	•
Overload cut-out	•
X-Tend support with limit stop	•
Clamping device	•
Number of batteries / number of chargers	0 / 0
Precision TCT saw blade	1 pc
Sawdust bag	•
Article number	43.008.80



## CORDLESS TABLE SAW



	<b>TE-TS 36/210 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	2x 18 V / -
Speed	3800 min <sup>-1</sup>
Saw blade	Ø 210 x Ø 30 mm
Number of teeth	40
Mitre cut	0° to 45° to the left
Cutting height 90°	70 mm
Cutting height 45°	45 mm
Bench size	467 x 480 mm
Max. cutting capacity on the right	625 mm
Product weight	13.1 kg (excl. battery)
Table extension	right, pull-out
Soft start	•
Overload cut-out	•
Number of batteries / number of chargers	0 / 0
Precision TCT saw blade	1 pc
Parallel stop, clamped on both sides	•
Angle stop	•
Push stick	•
Article number	43.404.50





## CORDLESS BAND SAW



	<b>TE-MB 18/127 U Li - Solo</b> <b>EXPERT</b> <span style="float: right;"><b>NEW</b></span>
PXC battery voltage / capacity	18 V / -
Speed	0 - 120 min <sup>-1</sup>
Number of speed settings	variable with 6 settings
Saw Band	1141 x 13 x 0.65 mm
Number of teeth	10/14 combination teeth
Mitre cut	0° to 45° to the left
Max. cutting capacity at 90°	127 x 127 mm
Max. cutting capacity at 45°	45 x 45 mm
Product weight	13.0 kg (excl. battery)
Work table removable	•
Constant electronics	•
Blade change without tools	•
Handle adjustable without tools	•
LED	•
Work bench with quick clamping mechanism	•
Number of batteries / number of chargers	0 / 0
Accessories	2x 10/14 T saw bands
Work table	•
Article number	45.042.15



## CORDLESS MULTIFUNCTIONAL TOOL



	<b>VARRITO</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Oscillating speed / idle speed	22000 - 40000 min <sup>-1</sup> / 11000 - 20000 min <sup>-1</sup>
Oscillation angle	3,2°
Abrasive paper size	93 x 93 x 93 mm
Product weight	1.0 kg (excl. battery)
Speed control electronics	•
Soft grip	•
Quick-release lock	•
Magnetic tool mounting	•
Oscillation decoupled battery uptake	•
Number of batteries / number of chargers	0 / 0
Delta grinding/sanding disc	•
Abrasive paper	3x P60, 3x P80, 3x P120
Scraper	•
Plunge-cut blades	1x wood/plastic, 1x metal
Segment saw blades	Wood/plastic/non-ferrous metal, tile joints (1x each)
Hex key	-
Packaging	Colour box
Article number	44.651.60



## CORDLESS BAND SANDER



	<b>TP-BS 18/457 Li Brushless - Solo</b> <b>PROFESSIONAL</b>
PXC battery voltage / capacity	18 V / -
Grinding/sanding belt speed	120 - 250 m/min
Grinding/sanding area	75 x 126
Grinding/sanding belt size	75 x 457
Product weight	2.5 kg
Brushless motor	•
Belt run adjustment	•
Belt change without tools	•
Dust extraction	by use of dust bag + dust extraction adapter
Soft grip	•
Number of batteries / number of chargers	0 / 0
Sanding/grinding belt	3x P80
Packaging	Colour box
Article number	44.662.70



## CORDLESS ORBITAL SANDER



	<b>TE-OS 18/230 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Oscillating speed	14000 - 22000 min <sup>-1</sup>
Oscillating circuit, Ø	2.5 mm
Abrasive paper size	230 x 115 mm
Product weight	1.6 kg (excl. battery)
Speed control electronics	•
Hook and loop fastening system	•
Clamping mechanism	•
Soft grip	•
Dust extraction	by use of dust bag + dust extraction adapter
Number of batteries / number of chargers	0 / 0
Abrasive paper	1x P60, 1x P80, 1x P120
Dust extraction adapter	•
Packaging	Colour box
Article number	44.607.20



## CORDLESS MULTI SANDER



	TE-OS 18/150 Li - Solo <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Oscillating speed	24000 min <sup>-1</sup>
Oscillating circuit, Ø	1.6 mm
Abrasive paper size	150 x 150 x 100 mm
Product weight	0.8 kg (excl. battery)
Speed control electronics	-
Hook and loop fastening system	•
Soft grip	•
Dust extraction	by use of dust collection box + dust extraction adapter
Number of batteries / number of chargers	0 / 0
Abrasive paper	3x P120, 3x P240
Dust extraction adapter	•
Packaging	Colour box
Article number	44.607.08



4 006825 651218

## CORDLESS ROTATING SANDER



	TE-RS 18 Li - Solo <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Oscillating speed	14000 - 22000 min <sup>-1</sup>
Oscillating circuit, Ø	2.0 mm
Abrasive paper, Ø	125 mm
Product weight	1.2 kg (excl. battery)
Speed control electronics	•
Hook and loop fastening system	•
Dust extraction	by use of dust bag + dust extraction adapter
Soft grip	•
Number of batteries / number of chargers	0 / 0
Abrasive paper	1x P80
Packaging	Colour box
Article number	44.620.10



4 006825 618341



## CORDLESS POLISHING/ SANDING MACHINE



	<b>CE-CP 18/180 Li E - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Idle speed	500 - 3000 min <sup>-1</sup>
Diameter	180 mm
Product weight	1.3 kg (excl. battery)
Brushless motor	•
Suitable for grinding	•
ON/OFF switch	•
Ergonomic soft grip	•
Speed control electronics	•
Spindle Lock	•
Hook and loop fastener for polishing/grinding acc.	•
Number of batteries / number of chargers	0 / 0
Synthetic bonnet	1 pc
Foam pad	1 pc
Abrasive paper (grit size 60, 80, 120)	1 of each
Packaging	Colour box
Article number	20.933.20



## CORDLESS CAR POLISHING MACHINE



	<b>CE-CB 18/254 Li - Solo</b> <b>CAR EXPERT</b>
PXC battery voltage / capacity	18 V / -
Idle speed	2500 min <sup>-1</sup>
Diameter	254 mm
Product weight	1.9 kg (excl. battery)
ON/OFF switch	•
Ergonomic soft grip	•
Number of batteries / number of chargers	0 / 0
Textile bonnet	1 pc
Synthetic bonnet	1 pc
Packaging	Colour box
Article number	20.933.01



## CORDLESS NAILER



	<b>TE-CN 18 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Shots per minute	20 min <sup>-1</sup>
Staple length	16 - 22 mm
Nail length	15 - 32 mm
Product weight	2.1 kg (excl. battery)
Cutting depth adjustment	•
Magazine with level indicator	•
Belt clip	•
Trigger catch	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Nails	300 pcs
Staples	300 pcs
Packaging	Colour box
Article number	42.577.90



## CORDLESS SEALING GUN



	<b>TE-SG 18/10 Li - Solo</b> <b>EXPERT</b> <b>NEW</b>
PXC battery voltage / capacity	18 V / -
Dispensing speed	0 - 26 mm/s
Dispensing force	2000 N
Inner diameter	51 mm
Cartridge volume	310 ml
Product weight	1.9 kg (excl. battery)
Brushless motor	-
Adjustable dispensing speed	•
Automatic reversing mechanism	•
Rubber pads	•
Soft grip	•
Number of batteries / number of chargers	0/0
Accessories	Cleaning needle
Packaging	Colour box
Article number	45.222.50



## CORDLESS PAINT SPRAY SYSTEM



	<b>TC-SY 18/60 Li - Solo</b> <b>CLASSIC</b>
PXC battery voltage / capacity	18 V / -
Charging time	-
Delivery rate	650 ml/min
Tank volume	800 ml
Max. viscosity	60 DIN-sec
Product weight	1.3 kg (excl. battery)
Brushless motor	-
Processing	Lacquers, glazes
Removable spray cap	•
Control of the paint delivery rate	•
Paint jet	Vertical, horizontal and round jet
Soft grip	•
Spray nozzles	Ø 2.0 mm, 2.5 mm
Cleaning brush and needle	•
Tank for testing the viscosity	•
Paint tank with cover	800 ml
Packaging	Colour box
Article number	42.600.25



## CORDLESS HOT GLUE GUN



	<b>TE-CG 18 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Warm-up period	120 s
Max. temperature	170 °C
Glue sticks, Ø	11 mm
Product weight	0.3 kg (excl. battery)
LED heat level indicator	•
LED light	•
Number of batteries / number of chargers	0 / 0
Accessories	5 glue sticks (l = 200 mm), flat glue nozzle
Packaging	Colour box
Article number	45.222.00



## CORDLESS HOT AIR GUN



	<b>TE-HA 18 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Temperature setting 1   setting 2	350 °C   550 °C
Air rate	200 l/min
Product weight	0.6 kg (excl. battery)
LED display	•
Overheating guard	•
Continuous operation setting	•
Mechanical nozzle ejector	•
Number of batteries / number of chargers	0 / 0
Reducer nozzle	•
Wide nozzle	•
Reflector nozzle	•
Packaging	Colour box
Article number	45.205.00





## CORDLESS BLOWER



	<b>TE-CB 18/180 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / –
Blowing air flow step 1   step 2	130 km/h   180 km/h
Product weight	1.0 kg (excl. battery)
Number of batteries / number of chargers	0 / 0
Inflation nozzles	3 pcs
Packaging	Colour box
Article number	34.080.01



4 006825 631746

## USB BATTERY ADAPTER



	<b>TC-CP 18 Li USB - Solo</b> <b>CLASSIC</b>
PXC battery voltage / capacity	18 V / –
USB connections	2
Output current USB 1	1.0 A
Output current USB 2	2.1 A
Product weight	0.1 kg (excl. battery)
Number of batteries / number of chargers	0 / 0
Packaging	Colour box
Article number	45.141.20



4 006825 608878

## ACCESSORIES – CASE



	<b>E-Box S35</b>
Items supplied	1 universal case
Internal dimensions	310 x 250 x 89.5 mm
External dimensions	350 x 330 x 110 mm
Load capacity	12 kg
Product weight	1.6 kg
Stackable + locking system	–
Splash-proof	•
Lockable	–
Foam inserts	•
Plastic compartments	–
Article number	45.300.45



4 006825 629750

## SYSTEM CASE E-CASE



	E-Case S-F
Items supplied	1x system case + 2x foam inserts for devices
Internal dimensions	421 x 281 x 96 mm
External dimensions	444 x 330 x 131 mm
Load capacity	25 kg
Product weight	1.7 kg
Stackable + locking system	•
Splash-proof	•
Lockable	•
Foam inserts	1x inlay for lid, 1x inlay for base
Article number	45.400.11



### STORAGE



### SORTING



### PROTECTING



### TRANSPORT



**THE NEW SYSTEM CASE BY  
EINHELL:  
ROBUST AND STACKABLE.**



## UNMATCHED FOR RUGGEDNESS!



**25 kg**

Maximum loading of a single case when carried by the handle on the side



**90 kg**

Maximum loading of several cases when carried by the broad handle on the top



**300 kg**

Concentrated loading from above – withstands the weight of one person without difficulty



**1000 kg**

Maximum permissible loading of the case at the bottom of the stack

## CORDLESS WET AND DRY VACUUM CLEANERS



	TC-VC 18/20 Li S - Solo <b>CLASSIC</b>	TE-VC 18/10 Li - Solo <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -	18 V / -
Suction power	80 mbar	90 mbar
Tank	Stainless steel, 20 l	Plastic, 10 l
Suction hose length / diameter	150 cm / 36 mm	200 cm / 36 mm
Product weight	3.6 kg (excl. battery)	3.1 kg (excl. battery)
Speed settings	1	1
Number of batteries / number of chargers	0 / 0	0 / 0
Suction tube	3-piece, plastic	-
Nozzles	Combination, crevice and upholstery nozzle (1x each)	2-in-1 crevice/brush nozzle, 2-in-1 upholstery/universal nozzle (1 of each)
Filters	Foam, pleated filter, dirt bag (1x each)	Foam filter, filter bag, dirt bag (1x each)
Packaging	Colour box	Colour box
Article number	23.471.30	23.471.60



4 006825 625998



4 006825 640274

## CORDLESS HANDHELD VACUUM CLEANER



	TE-VC 18 Li - Solo <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Suction power	42 mbar
Tank	Plastic, 0.54 l
Suction hose length	46.5 cm
Product weight	0.9 kg (excl. battery)
Speed settings	1
Number of batteries / number of chargers	0 / 0
Nozzles	Floor, crevice, upholstery nozzle (1x each)
Filters	1 washable synthesis filter (1x each)
Wall bracket	•
Packaging	Colour box
Article number	23.471.20



4 006825 612646



# CORDLESS STICK VAC CLEANER

## LIGHTWEIGHT DESIGN

for tireless working in and around the house

## 2-IN-1 FUNCTION

Usable as a hand vacuum as well as perfect handling when cleaning floors as a cordless stick vacuum cleaner

## HIGH SPEED CHARGING TECHNOLOGY

Short charging times and uninterrupted operation


## CORDLESS, BUT UNLIMITED RUNTIME

thanks to the Power X-Change interchangeable battery system

## POWER BRUSH WITH 2 SETTINGS

Adjustment to every situation in just two steps, ECO for handling normal dirt load with maximum running time, BOOST for handling stubborn dirt load with maximum suction, e.g. on carpets

## CORDLESS STICK VAC CLEANER

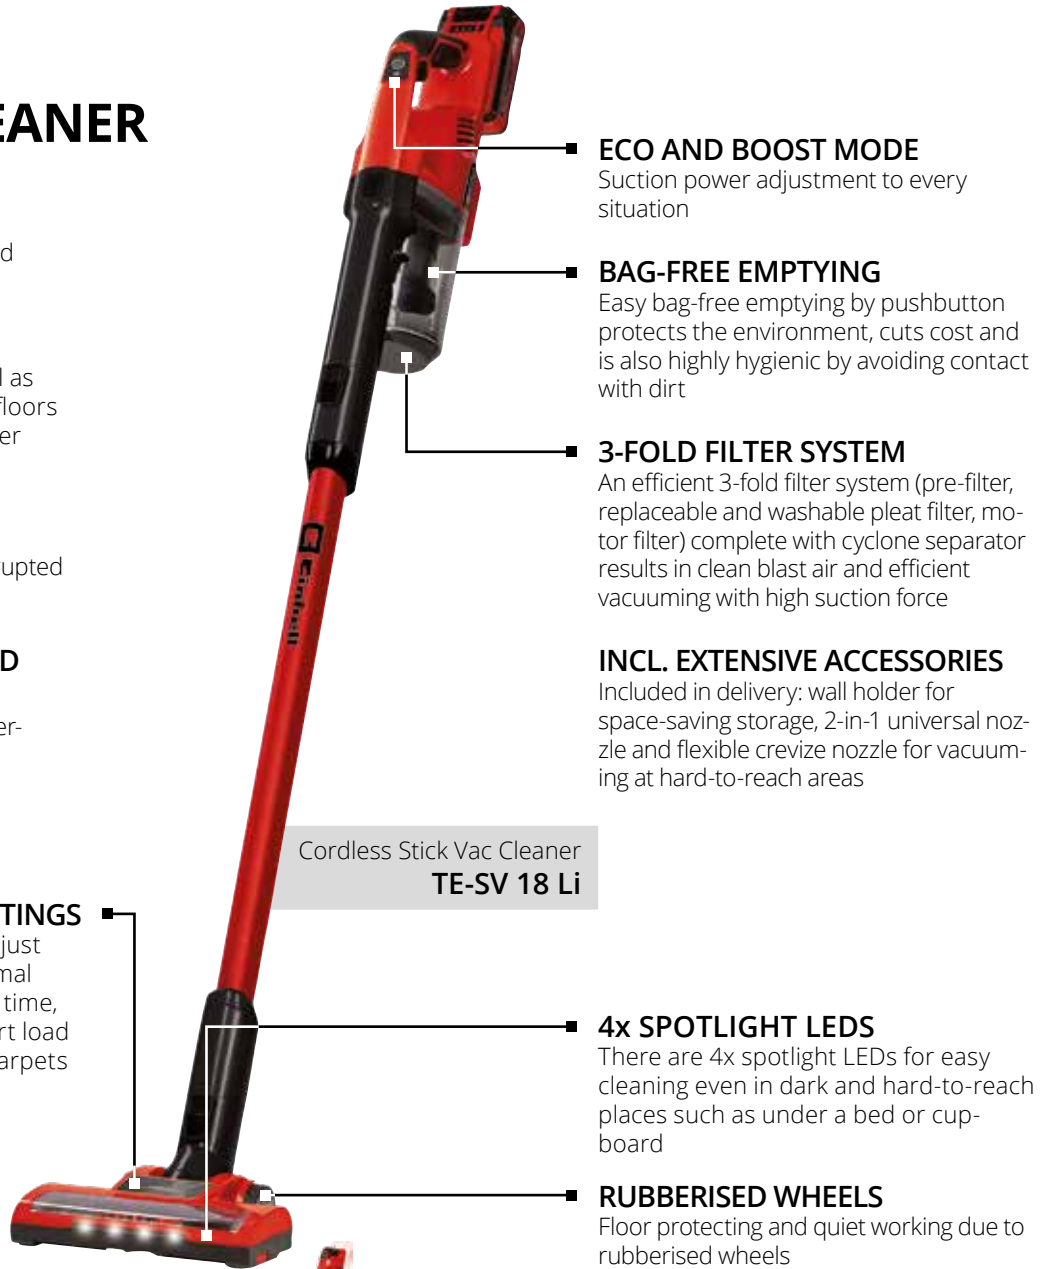

Cordless Stick Vac Cleaner  
**TE-SV 18 Li**

### ECO AND BOOST MODE

Suction power adjustment to every situation

### BAG-FREE EMPTYING

Easy bag-free emptying by pushbutton protects the environment, cuts cost and is also highly hygienic by avoiding contact with dirt

### 3-FOLD FILTER SYSTEM

An efficient 3-fold filter system (pre-filter, replaceable and washable pleat filter, motor filter) complete with cyclone separator results in clean blast air and efficient vacuuming with high suction force

### INCL. EXTENSIVE ACCESSORIES

Included in delivery: wall holder for space-saving storage, 2-in-1 universal nozzle and flexible crevice nozzle for vacuuming at hard-to-reach areas

### 4x SPOTLIGHT LEDs

There are 4x spotlight LEDs for easy cleaning even in dark and hard-to-reach places such as under a bed or cupboard

### RUBBERISED WHEELS

Floor protecting and quiet working due to rubberised wheels



	<b>TE-SV 18 Li - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	18 V / -
Tank volume	0.6 l
Product weight	1.05 kg (excl. battery)
Speed settings	2
Number of batteries / number of chargers	0 / 0
Nozzles	Motorised power brush, 2-in-1 universal nozzle, flexible crevice nozzle
Filters	3-fold filter system: pre-filter, replaceable and washable pleat filter, motor filter
Wall bracket	•
Rubberised wheels	•
LED	•
Packaging	Colour box
Article number	23.471.80



### 3-IN-1 CORDLESS COMPRESSOR



	<b>PRESSITO 18/21</b> <b>EXPERT</b> <span style="float: right;"><b>NEW</b></span>
PXC battery voltage / capacity	18 V / -
Suction power	21 l/min
Output rate 0 bar   4 bar   7 bar	14 l/min   9 l/min   6 l/min
Max. operating pressure	10.5 bar
Product weight	2.1 kg (excl. battery)
Push button for high-pressure pump	•
Digital pressure indicator	•
Soft grip	•
Accessory storage	•
Number of batteries / number of chargers	0 / 0
Hoses incl.	High pressure hose, low pressure hose
Adapter set	•
Packaging	Colour box
Article number	40.204.67



### CORDLESS COMPRESSOR


TWIN-PACK®  
 18V + 18V → 36V  
 TECHNOLOGY



	<b>TE-AC 36/6/8 Li OF Set - Solo</b> <b>EXPERT</b>
PXC battery voltage / capacity	2x 18 V / -
Suction power	130 l/min
Output rate 0 bar   4 bar   7 bar	90 l/min   55 l/min   38 l/min
Tank capacity	6 l
Max. operating pressure	8 bar
Product weight	9.7 kg (excl. batteries)
Pressure reducer	•
Accessory storage	•
Number of batteries / number of chargers	0 / 0
Compressed air hose	•
Blow-out pistol	•
Tire pressure gauge	•
Adapter set	•
Packaging	Colour box
Article number	40.204.50




## ACCESSORIES – BATTERIES



	5-8 Ah Multi-Ah Power X-Change Plus Battery <b>NEW</b>	4.0 Ah Power X-Change Plus Battery <b>NEW</b>
Items supplied	1 battery	1 battery
PXC battery voltage / capacity	18 V / 8.0 Ah or 5.0 Ah (depending on the application)	18 V / 4.0 Ah
Battery power	max. 1350 W	max. 900 W
Product weight	1.04 kg	0.58 kg
Article number	45.116.00	45.115.53



## ACCESSORIES – STARTER KITS



	5.2 Ah PXC Fastcharger Starter-Kit	4.0 Ah Power X-Change Starter Kit	2.5 Ah Power X-Change Starter Kit
Items supplied	1 battery + 1 Power X-Fastcharger 4 A	1 battery + 1 Power X-Charger 3 A	1 battery + 1 Power X-Charger 3 A
PXC battery voltage / capacity	18 V / 5.2 Ah	18 V / 4.0 Ah	18 V / 2.5 Ah
Battery power	max. 1260 W	max. 900 W	max. 720 W
Charging current	4 A	3 A	3 A
Mains voltage	220 - 240 V ~ 50-60 Hz	220 - 240 V ~ 50-60 Hz	220 - 240 V ~ 50-60 Hz
Integrated wall mount	•	•	•
Article number	45.121.14	45.120.42	45.120.97



**OUT-AND-ABOUT AND NO POWER SOCKET AVAILABLE?  
NO PROBLEM  
THANKS TO EINHELL!**



	Power X-Car Charger 3 A <b>NEW</b>
Items supplied	1 charger
Can be used for	18 V Power X-Change batteries
Charging current	3 A
Integrated wall mount	•
Operating voltage	12 V DC
Article number	45.121.13





THE BATTERY GUIDE – IT'S WHAT YOU NEED THAT MATTERS.



			18 V 2.5 Ah	18 V 4.0 Ah	18 V 5.2 Ah	18 V 8.0 Ah
Cordless Drills	TE-CD 18/45 3X-Li		400 pcs	640 pcs	830 pcs	1280 pcs
Cordless Impact Drills	TE-CD 18/48 Li-i		380 pcs	620 pcs	780 pcs	1240 pcs
	TE-CD 18 Li-i Brushless		440 pcs	700 pcs	920 pcs	1400 pcs
Cordless Impact Driver / Wrenches	TP-CI 18 Li Brushless		350 pcs	560 pcs	730 pcs	1120 pcs
	IMPAXXO 18/400		68 pcs	110 pcs	140 pcs	220 pcs
	TE-CW 18 Li Brushless		125 pcs	200 pcs	260 pcs	400 pcs
Cordless Drywall Screwdriver	TE-DY 18 Li		1350 pcs	2200 pcs	2800 pcs	4400 pcs
Cordless Impact Drill	TC-ID 18 Li		75 pcs	120 pcs	156 pcs	240 pcs
Cordless Rotary Hammers	HEROCCO 36/28		105 holes	169 holes	222 holes	338 holes
	HEROCCO 18/20		417 pcs 108 holes	670 pcs 174 holes	870 pcs 225 holes	1340 pcs 348 holes
	TE-HD 18 Li		225 pcs 56 holes	360 pcs 90 holes	465 pcs 117 holes	720 pcs 180 holes
Cordless Paint/Mortar Mixer	TE-MX 18 Li		25 min 20 min	40 min 32 min	52 min 42 min	80 min 64 min
Cordless Angle Grinders	AXXIO 36/230 Q		41 pcs	62 pcs	81 pcs	124 pcs
	AXXIO 18/125 Li		37 pcs	61 pcs	85 pcs	122 pcs
	AXXIO 18/115 Q		37 pcs	63 pcs	92 pcs	126 pcs
	TE-AG 18/115 Li		25 pcs	40 pcs	60 pcs	80 pcs
Cordless Biscuit Joiner	TE-BJ 18 Li		353 pcs	566 pcs	735 pcs	1132 pcs
Cordless Planer	TE-PL 18/82 Li		28 m	48 m	58 m	96 m
Cordless Jigsaw	TE-JS 18/80 Li		11 m	20 m	30 m	40 m
Cordless Circular Saws	TE-CS 18/190 Li Brushless		30 m	49 m	63 m	98 m
	TE-CS 18/165-1 Li		40 m	64 m	82 m	128 m
Cordless Mini Circular Saw	TE-CS 18/89 Li		50 m	72 m	104 m	144 m
Cordless All Purpose Saws	TE-AP 18/28 Li Brushless		332 pcs	556 pcs	723 pcs	1112 pcs
	TE-AP 18/26 Li		259 pcs	414 pcs	572 pcs	828 pcs
	TE-AP 18 Li		240 pcs	370 pcs	570 pcs	740 pcs
Cordless Sliding Mitre Saw	TE-SM 36/210 Li		230 pcs 435 pcs	370 pcs 700 pcs	480 pcs 910 pcs	740 pcs 1400 pcs
Cordless All Purpose Saw	TE-AP 18/22 Li		240 pcs	370 pcs	570 pcs	740 pcs
Cordless Sliding Mitre Saw	TE-SM 36/210 Li		230 pcs 435 pcs	370 pcs 700 pcs	480 pcs 910 pcs	740 pcs 1400 pcs
Cordless Table Saw	TE-TS 36/210 Li		71 m	122 m	160 m	244 m

## THE BATTERY GUIDE – IT'S WHAT YOU NEED THAT MATTERS.

			18 V 2.5 Ah	18 V 4.0 Ah	18 V 5.2 Ah	18 V 8.0 Ah
Cordless Band Saw	TE-MB 18/127 U Li		35 pcs	60 pcs	78 pcs	120 pcs
Cordless Multifunctional Tool	VARRITO		38 min 900 pcs	60 min 1440 pcs	78 min 1880 pcs	120 min 2880 pcs
Cordless Band Sander	TE-BS 18/457 Li Brushless		18 min	30 min	38 min	59 min
Cordless Orbital Sanders	TE-OS 18/230 Li		33 min	54 min	70 min	108 min
Cordless Multi Sander	TE-OS 18/150 Li		34 min	55 min	70 min	110 min
Cordless Rotary Sander	TE-RS 18 Li		25 min	40 min	52 min	80 min
Cordless Polishing/ Sanding Machine	CE-CP 18/180 Li E		25 min	43 min	54 min	86 min
Cordless Car Polishing Machine	CE-CB 18/254 Li		93 min	127 min	200 min	254 min
Cordless Nailer	TE-CN 18 Li		2670 pcs 2642 pcs	4272 pcs 4228 pcs	5554 pcs 5496 pcs	8544 min 8456 pcs
Cordless Paint Spray System	TC-SY 18/60 Li		38 m <sup>2</sup>	60 m <sup>2</sup>	78 m <sup>2</sup>	120 m <sup>2</sup>
Cordless Hot Glue Gun	TE-CG 18 Li		22 pcs	36 pcs	44 pcs	72 pcs
Cordless Hot Air Gun	TE-HA 18 Li		11 min	17 min	22 min	34 min
Cordless Blower	TE-CB 18/180 Li		48 min	68 min	100 min	136 min
USB Battery Adapter	TC-CP 18 Li USB		13.5 h	24 h	32 h	48 h
Cordless Wet and Dry Vacuum Cleaners	TC-VC 18/20 Li S		11 min	20 min	25 min	40 min
	TE-VC 18/10 Li		12 min	21 min	26 min	42 min
Cordless Handheld Vacuum Cleaner	TE-VC 18 Li		18 min	31 min	40 min	62 min
Cordless Stick Vac Cleaner	TE-SV 18 Li	BOOST ECO	13 min 31 min	22 min 50 min	28 min 65 min	44 min 100 min
3-in-1 Cordless Compressor	PRESSITO 18/21		37 min	60 min	85 min	120 min
Cordless Compressor	TE-AC 36/6/8 Li OF		29 min	50 min	60 min	100 min
			435 pcs	800 pcs	900 pcs	1600 pcs

79 holes








### BASIC PERFORMANCE – Upgrade recommended

Figures shown in lighter fields (for example see above) indicate that we recommend using a battery with greater power/capacity for full power and the appropriate operating time of the machine.

All stated values are maximum values. They were determined under standardised test conditions and may differ from the values achievable in everyday operation.

## THE BATTERY GUIDE – IT'S WHAT YOU NEED THAT MATTERS.

### Key to Symbols:

-  Screwing 6 x 60 mm screws into softwood – max. quantity per battery charge
-  Tightening/loosening wheel bolts (hexagon head, size 22 mm) – max. quantity per battery charge
-  Screwing drywall screws size 3.9 x 25 mm in dry construction boards
-  Ø 6 mm / 50 mm into brick – max. quantity per battery charge
-  Ø 6 mm / 50 mm into concrete – max. quantity per battery charge
-  **paint mortar** Mixing wall paint / mortar, time per battery charge
-  Cutting through round steel Ø 12 mm – max. quantity per battery charge
-  Cutting grooves in softwood for flat dowels (size 10) – max. quantity per battery charge
-  Planing of softwood (depth: 1 mm, width 50 mm) – max. planing performance (in m) per battery charge
-  Particleboard 19 mm – max. cutting capacity (in m) per battery charge
-  Roundwood Ø 35 mm – max. number of cuts per battery charge
-  Square softwood 60 x 60 mm – max. number of cuts per battery charge
-  Rectangular tube 40 x 40 x 2 mm – max. number of cuts per battery charge
-  Laminate 195 x 8 mm – max. number of cuts per battery charge
-  Max. operating time per battery charge in idle mode
-  Cutting through round plastics Ø 10 mm – max. number of cuts per battery charge
-  Glue sticks Ø 11 mm, length 200 mm – max. number per battery charge
-  32 mm nails in softwood at maximum depth setting – max. number per battery charge
-  22 mm staples in softwood at maximum depth setting – max. number per battery charge
-  Max. area coverage per battery charge with paint viscosity of 60 DIN-sec and single application
-  Charging time per battery charge
-  **BOOST ECO** Max. idling time per battery charge in BOOST / ECO mode
-  3 km/h Max. area coverage per battery charge at 3 km/h walking speed
-  13 mm staples in softwood - max. number per battery charge

**THE MOST ADVANCED BATTERY SYSTEM**





# HANDHELD POWER TOOLS





## DRYWALL SCREWDRIVER

**AUTO-  
START-  
STOP**



	<b>TH-DY 500 E</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Rated input	500 W
Speed	0 - 2200 min <sup>-1</sup>
Tool mounting	Internal hexagon 6.35 mm (1/4")
Product weight	1.7 kg
Aluminium gear head	•
Adjustable screwing depth	•
Automatic start/stop gearing	•
Belt clip	•
Locking button for permanent operation	•
Electronic speed control	•
Packaging	Colour box
Article number	42.599.05



4 006825 587821

## IMPACT DRILLS

**2 FUNCTIONS**



	<b>TC-ID 1000 E</b> <b>CLASSIC</b>	<b>TC-ID 720/1 E</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50-60 Hz
Rated input	1010 W	720 W
Idle speed	0 - 3000 min <sup>-1</sup>	0 - 2800 min <sup>-1</sup>
Blow rate	0 - 48000 min <sup>-1</sup>	0 - 44800 min <sup>-1</sup>
Drilling capacity, wood	32 mm	30 mm
Drilling capacity, cement	16 mm	13 mm
Drilling capacity, steel	13 mm	10 mm
Drill chuck	13 mm	13 mm
Product weight	2.1 kg	2.0 kg
Speed control electronics	•	•
Soft grip	•	•
Metal drill chuck	•	-
Additional handle	•	•
Packaging	Colour box	Colour box
Article number	42.598.25	42.598.48



4 006825 587777



4 006825 641844

## ROTARY HAMMER 5 KG CLASS



	<b>TE-RH 38 E</b> <b>EXPERT PLUS</b>
Mains connection	220 - 240 V ~ 50 Hz
Rated input	1050 W
Idle speed	0 - 500 min <sup>-1</sup>
Blow rate	0 - 4100 min <sup>-1</sup>
Impact force	9.0 J
Drilling capacity, cement	38 mm
Drill chuck	SDS-max
Product weight	6.7 kg
Speed control electronics	•
Lock for continuous operation	-
Pneumatic impact mechanism	•
Functions	3
Service interval indicator	•
Overload safety stop	•
Vibration-cushioned main handle	•
Additional handle	•
Metal depth stop	•
Packaging	Case
Article number	42.579.50



4 006825 595451

## ROTARY HAMMERS 2 KG CLASS



	<b>TC-RH 800 4F</b> <b>CLASSIC</b>	<b>TC-RH 800 E</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	800 W	800 W
Idle speed	0 - 930 min <sup>-1</sup>	0 - 1000 min <sup>-1</sup>
Blow rate	0 - 4500 min <sup>-1</sup>	0 - 5180 min <sup>-1</sup>
Impact force	2.6 J	2.5 J
Drilling capacity, cement	26 mm	26 mm
Drill chuck	SDS-plus	SDS-plus
Product weight	3.2 kg	3.3 kg
Speed control electronics	•	•
Lock for continuous operation	•	•
Overload safety stop	•	•
Pneumatic impact mechanism	•	•
Functions	4	4
Additional handle	•	•
Metal depth stop	•	•
Packaging	E-Box Basic	Case
Article number	42.579.80	42.579.20



4 006825 634570



4 006825 581522

## DEMOLITION HAMMERS



	TP-DH 50 <b>PROFESSIONAL</b>	TE-DH 32 <b>EXPERT</b>
Mains connection	220 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	1700 W	1500 W
Blow rate	1800 min <sup>-1</sup>	1900 min <sup>-1</sup>
Impact force	50 J	32 J
Drill chuck	SDS-hex	SDS-max
Product weight	18.4 kg	10.8 kg
Pneumatic impact mechanism	•	•
Vibration-cushioned main handle	•	•
Lock for continuous operation	•	•
Additional handle	•	•
Accessories	1 pointed chisel, 1 flat chisel	1 pointed chisel, 1 flat chisel
Packaging	E-Box trolley	E-Box
Article number	41.391.30	41.390.99



4 006825 630305



4 006825 650334

## ANGLE GRINDER 230 MM



	TE-AG 230 <b>EXPERT</b>
Mains connection	230 V ~ 50 Hz
Rated input	2350 W
Idle speed	6500 min <sup>-1</sup>
Wheel diameter	230 mm
Product weight	6.0 kg
Vibration-cushioned main handle	•
Swivel handle	•
Disc guard with quick adjust facility	•
Spindle Lock	•
Soft grip	•
Additional handle	can be mounted in 3 positions
Soft start	•
Cable clip	•
Face spanner	•
Packaging	Colour box
Article number	44.308.70



4 006825 577235

## ANGLE GRINDER 125 MM



	<b>TE-AG 125/750</b> <b>EXPERT</b>
Mains connection	230 V ~ 50 Hz
Rated input	750 W
Idle speed	12000 min <sup>-1</sup>
Wheel diameter	125 mm
Product weight	1.9 kg
Restart safeguard	•
Safety switch	•
Disc guard with quick adjust facility	•
Spindle Lock	•
Soft grip	•
Additional handle	can be mounted in 3 positions
Soft start	-
Cable clip	•
Face spanner	•
Packaging	Colour box
Article number	44.308.80



## ANGLE GRINDERS 115 MM



	<b>TE-AG 115</b> <b>EXPERT</b>	<b>TE-AG 115/600</b> <b>EXPERT</b>
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	720 W	600 W
Idle speed	12000 min <sup>-1</sup>	12000 min <sup>-1</sup>
Wheel diameter	115 mm	115 mm
Product weight	1.9 kg	1.9 kg
Restart safeguard	•	•
Safety switch	•	•
Disc guard with quick adjust facility	•	•
Spindle Lock	•	•
Soft grip	•	•
Additional handle	can be mounted in 3 positions	can be mounted in 3 positions
Soft start	-	-
Cable clip	•	•
Face spanner	•	•
Packaging	Colour box	Colour box
Article number	44.308.50	44.308.55





## ANGLE GRINDERS ACCESSORIES



	TS 230/1 Cutting Stand	TS 115/125 Cutting Stand
For angle grinders with wheels Ø	230 mm	115 / 125 mm
Packaging	Colour box	Colour box
Article number	44.310.51	44.310.44



4 006825 632743



4 006825 632736

## WALL LINER



	TE-MA 1700 <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz
Rated input	1700 W
Idle speed	7000 min <sup>-1</sup>
Cutting wheel	Ø 150 x Ø 22 mm
Channel depth	8 - 40 mm
Channel width	8 - 38 mm
Spindle thread	M14
Product weight	5.8 kg
Infinitely adjustable cutting depth	•
Overload cut-out	•
Soft start	•
Spindle Lock	•
Dust extraction	•
Diamond cutting wheel	4 pcs
Packaging	Colour box
Article number	43.507.40



4 006825 659146

## BISCUIT JOINER



	TC-BJ 900 <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Rated input	860 W
Idle speed	11000 min <sup>-1</sup>
Max. cutting depth	14 mm
Tilt angle adjustment	90°
Channel cutter	Ø 100 x Ø 22 x 3.8 mm
Product weight	3.3 kg
Infinitely adjustable angle setting	•
Infinitely adjustable height	•
Cutting depth quick-set adjustment	3 settings
Spindle Lock	•
Dust extraction	by use of dust bag
Face spanner	•
Packaging	Colour box
Article number	43.506.20



## ROUTER



	TC-RO 1155 E <b>CLASSIC</b>
Mains connection	230 - 240 V ~ 50 Hz
Rated input	1100 W
Idle speed	11000 - 30000 min <sup>-1</sup>
Stroke height	55 mm
Max. form cutter	30 mm
Product weight	3.0 kg
Speed control electronics	•
Cutting depth fine adjustment	•
Chip shield	•
Spindle Lock	•
Parallel stop	•
Compass point	•
Copy sleeve	•
Clamp diameter	6.35 mm (1/4") / 8 mm
Packaging	Colour box
Article number	43.504.70



## PLANER



	TE-PL 900 <b>EXPERT</b>
Mains connection	230 V - 50 Hz
Rated input	900 W
Idle speed	15000 min <sup>-1</sup>
Planing width	82 mm
Chip depth	3 mm
Rebate depth	18 mm
Product weight	3.6 kg
Soft grip	•
Automatic blade protector	•
Aluminium sole plates	•
V grooves	3 pcs
Chip ejection	double-sided
Cable clip	•
Parallel stop	•
Rebate depth stop	•
Planing blades (reversible blades)	1 pair TCT
Packaging	Colour box
Article number	43.453.20



4 006825 645668

## JIGSAW



	TC-JS 80/1 <b>CLASSIC</b>
Mains connection	220 - 240 V - 50/60 Hz
Rated input	550 W
Stroke speed	1000 - 3000 min <sup>-1</sup>
Cutting depth (wood/plastic/steel)	80 / 12 / 10 mm
Product weight	1.9 kg
Pendulum action	4 settings
Blade change without tools	•
Vacuum cleaner connection	•
Packaging	Colour box
Article number	43.211.45



4 006825 619737

## CIRCULAR SAWS



	<b>TE-CS 190/1</b> <b>EXPERT</b>	<b>TC-CS 1410</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	1500 W	1410 W
Idle speed	5500 min <sup>-1</sup>	5500 min <sup>-1</sup>
Saw blade	Ø 190 x Ø 30 mm	Ø 190 x Ø 30 mm
Cutting depth 90°	66 mm	67 mm
Cutting depth 45°	48 mm	46 mm
Product weight	5.2 kg	4.3 kg
Adjustment without tools (depth/angle)	•	•
LED	•	-
Aluminium sawing table	•	-
Spindle Lock	•	•
Double-sided safety lock-off	•	•
Dust extraction device	•	•
Soft grip	•	•
Accessories	Parallel stop	Parallel stop
Packaging	Colour box	Colour box
Article number	43.310.05	43.310.50



## CIRCULAR SAWS



	<b>TC-CS 1400</b> <b>CLASSIC</b>	<b>TC-CS 1200</b> <b>CLASSIC</b>	<b>TE-CS 165</b> <b>EXPERT</b>
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1400 W	1230 W	1200 W
Idle speed	5200 min <sup>-1</sup>	5000 min <sup>-1</sup>	5500 min <sup>-1</sup>
Saw blade	Ø 190 x Ø 30 mm	Ø 160 x Ø 16 mm	Ø 165 x Ø 16 mm
Cutting depth 90°	66 mm	55 mm	55 mm
Cutting depth 45°	45 mm	37 mm	40 mm
Product weight	4.3 kg	3.7 kg	3.8 kg
Adjustment without tools (depth/angle)	•	•	•
Aluminium sawing table	-	-	•
Spindle Lock	-	-	•
Double-sided safety lock-off	-	-	•
Dust extraction device	•	•	•
Soft grip	-	-	•
Saw blade	•	•	•
Accessories	Parallel stop	Parallel stop	Parallel stop
Packaging	Colour box	Colour box	Colour box
Article number	43.309.37	43.309.36	43.310.10





## PLUNGE CUT SAW



	<b>TE-PS 165</b> <b>EXPERT</b>
Mains connection	220 - 240 V ~ 50 Hz
Rated input	1200 W
Idle speed	5200 min <sup>-1</sup>
Saw blade	Ø 165 x Ø 20 mm
Cutting depth 90°	56 mm
Cutting depth 45°	42 mm
Product weight	4.8 kg
Adjustment without tools (depth/angle)	•
LED	-
Aluminium sawing table	•
Spindle Lock	•
Dust extraction device	•
Soft grip	•
Cutting line guide	•
Accessories	Parallel stop
Packaging	Colour box
Article number	43.313.00



4 006825 629668

## MINI CIRCULAR SAW



	<b>TC-CS 89</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz
Rated input	600 W
Idle speed	7200 min <sup>-1</sup>
Saw blade	Ø 89 x Ø 10 mm
Cutting depth	27 mm
Product weight	2.0 kg
Cutting depth adjustment without tools	•
Aluminium sawing table	•
Dust extraction adapter	•
Soft grip	•
Accessories	2 saw blades (wood/plastic), 1 diamond cutting wheel, parallel stop
Packaging	Colour box
Article number	43.310.30



4 006825 646054

## CIRCULAR SAWS ACCESSORIES



	<b>Guide Bar Aluminium 2x 1000 mm</b>
Can be used for	TE-PS 165   TC-CS 1250   TC-CS 1410   TE-CS 165   TE-CS 190/1   TE-CS 18/150 Li   TE-CS 18/165-1 Li   TP-CS 18/190 Li BL
Set	2-piece
Length (total)	2000 mm
Packaging	Colour box
Article number	45.021.18



4 006825 632675

## ALL PURPOSE SAW



	<b>TE-AP 750 E</b> <b>EXPERT</b>
Mains connection	220 - 240 V ~ 50 Hz
Rated input	750 W
Stroke speed	0 - 2800 min <sup>-1</sup>
Stroke height	20 mm
Cutting depth (wood / steel)	150 / 10 mm
Saw blade thickness	0.8 - 1.5 mm
Product weight	2.4 kg
Blade change without tools	•
Soleplate adjustment without tools	•
Soft grip	•
Accessories	1 kwb saw blade
Packaging	Colour box
Article number	43.261.70



4 006825 632682

## GRINDING AND ENGRAVING TOOL



	<b>TC-MG 135 E</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Rated input	135 W
Idle speed	10000 - 35000 min <sup>-1</sup>
Clamping sleeves, Ø	0.5 / 1.6 / 2.4 / 3.2 mm
Product weight	0.7 kg
Speed control electronics	•
Spindle Lock	•
Soft grip	•
Accessories Set	189-piece accessory set in storage case
Telescopic stand	•
Flexible shaft	•
Packaging	Case
Article number	44.191.69



4 006825 585315

## ORBITAL SANDERS



	TE-OS 2520 E <b>EXPERT</b>	TC-OS 1520 <b>CLASSIC</b>
Mains connection	230 V - 50 Hz	230 V - 50 Hz
Rated input	250 W	150 W
Oscillating speed	14000 - 24000 min <sup>-1</sup>	23000 min <sup>-1</sup>
Oscillating circuit, Ø	2.0 mm	2.0 mm
Grinding/sanding area	230 x 115 mm	187 x 90 mm
Abrasive paper size, hook and loop fastening system	230 x 115 mm	187 x 93 mm
Abrasive paper size, clamping mechanism	280 x 115 mm	230 x 93 mm
Product weight	1.9 kg	1.1 kg
Speed control electronics	•	-
Hook and loop fastening system	•	•
Clamping mechanism	•	•
Dust extraction	by use of dust collection box + dust extraction adapter	by use of dust extraction adapter
Low Vibration	•	-
Aluminium sole plate	•	-
Soft grip	•	•
Abrasive paper	1x P120	3x P120
Packaging	Colour box	Colour box
Article number	44.606.20	44.606.40



4 006825 592498



4 006825 593693

## BAND SANDER



	TE-BS 8540 E <b>EXPERT</b>
Mains connection	230 V - 50 Hz
Rated input	850 W
Grinding/sanding belt speed	300 - 400 m/min
Grinding/sanding area	75 x 140 mm
Grinding/sanding belt size	75 x 533 mm
Product weight	3.1 kg
Belt run adjustment	•
Belt change without tools	•
Dust extraction	by use of dust collection box + dust extraction adapter
Soft grip	•
Additional handle	•
Folding front cover	•
Cable clip	•
Sanding/grinding belt	1x P80
Packaging	Colour box
Article number	44.662.30



4 006825 537307

## MULTI SANDER



	<b>TH-OS 1016</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Rated input	100 W
Oscillating speed	24000 min <sup>-1</sup>
Oscillating circuit, Ø	1.6 mm
Abrasive paper size	150 x 150 x 100 mm
Product weight	1.0 kg
Soft grip	•
Hook and loop fastening system	•
Dust extraction	by use of dust bag + dust extraction adapter
Abrasive paper	1x P120
Packaging	Colour box
Article number	44.606.10



4 006825 592481

## ROTATING SANDER



	<b>TE-RS 40 E</b> <b>EXPERT</b>
Mains connection	230 V ~ 50 Hz
Rated input	400 W
Oscillating speed	12000 - 24000 min <sup>-1</sup>
Oscillating circuit, Ø	2.5 mm
Abrasive paper, Ø	125 mm
Product weight	2.1 kg
Speed control electronics	•
Hook and loop fastening system	•
Dust extraction	by use of dust collection box + dust extraction adapter
Soft grip	•
Additional handle	•
Low Vibration	•
Abrasive paper	-
Packaging	Colour box
Article number	44.620.00



4 006825 590661



## ELECTRIC PAINT SPRAY SYSTEM (SEMI-STATIONARY)



	<b>TC-SY 600 S</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz
Rated input	600 W
Delivery rate	1000 ml/min
Tank volume	800 ml
Hose length	1.8 m
Product weight	2.3 kg
Processing	Lacquers, glazes, interior wall paints
Removable spray cap	•
Control of the paint delivery rate	•
Paint jet	Vertical, horizontal and round jet
Soft grip	•
Shoulder strap	•
Slide	-
Spray nozzles	Ø 2.5 mm, Ø 3.0 mm
Cleaning brush and needle	•
Tank for testing the viscosity	•
Paint tank with cover	800 ml
Packaging	Colour box
Article number	42.600.15



4 006825 614572

## HOT AIR GUN



	<b>TH-HA 2000/1</b> <b>CLASSIC</b>
Mains voltage	230 / 240 V ~ 50 Hz
Rated input	2000 W
Air rate	300 / 500 l/min
Temperature	350 / 550 °C
Product weight	0.7 kg
Air rate and temperature control system	2 settings
Overheating guard	•
Storage area	•
Wide nozzle	•
Reducer nozzle	•
Reflector nozzle	•
Heat nozzle	•
Paint scraper	•
Packaging	Colour box
Article number	45.201.79



4 006825 593235

## CROSS LASER LEVEL



	TC-LL 2 <b>CLASSIC</b>
Laser diode	635 nm
Laser class	2
Work area	8 m
Precision	+/- 0.5 mm/m
Self-levelling time	< 5 s
Levelling range	+/- 4°
Tripod socket	1/4"
Product weight	0.2 kg
Laser crosshair	•
Horizontal and/or vertical laser line	•
Horizontal 360° laser line	-
Self-levelling	•
Digital spirit level	•
Soft grip	•
Storage case	•
Height-adjustable wall mount	-
Universal clamp	•
Batteries	-
Packaging	Colour box
Article number	22.701.05



4 006825 616231

## LASER LEVELLING



	TC-LL 1 <b>CLASSIC</b>
Laser diode	650 nm
Laser class	2
Work area	Laser line: 5 m, laser dot: 20 m
Precision	+/- 0.5 mm/m
Product weight	0.1 kg
Spirit level function	•
Soft grip	•
Flexible wall mount	•
Batteries	-
Packaging	Colour box
Article number	22.700.95



4 006825 616217

## LASER DISTANCE METER



	<b>TC-LD 50</b> <b>CLASSIC</b>
Laser diode	635 nm
Laser class	2
Measuring range	0.05 - 50 m
Measurement accuracy	+/- 2.0 mm/m
Switches off automatically	from 3 min
Measurement reference	Front edge, back edge or stop plate
Product weight	0.1 kg
Measurement of lengths, areas and volumes	•
Addition and subtraction	of lengths, areas and volumes
Continuous measurements with min/max function	•
Safety function	•
Pythagoras function	•
Disconnection function	•
Last measurements are saved automatically	20
Soft grip	•
Storage case	•
Batteries	-
Packaging	Colour box
Article number	22.700.80



## DIGITAL DETECTOR



	<b>TC-MD 50</b> <b>CLASSIC</b>
Max. scanning depth: wood	19 mm
Max. scanning depth: non-ferrous metals	19 mm
Max. scanning depth: ferrous metals	50 mm
Max. scanning depth: copper	38 mm
Max. scanning depth: live wires	50 mm
Switches off automatically	from 1 min
Product weight	0.1 kg
Acoustic warning signal	•
Wall protection	•
Soft grip	•
Batteries	-
Packaging	Colour box
Article number	22.700.90



## WOODWORKING ACCESSORY



	<b>Moisture Meter</b>
Measurement range wood / solid material	6 - 60 % / 0.2 - 2.9 %
Measurement range (temperature)	0 - 40 °C
Resolution wood / solid material	1 % / 0.1 %
Accuracy of measurement wood / solid material	2 % / 0.1 %
Battery type	PP3 (9 V)
LCD display	•
Moisture measurements on	Wood and solid material
Automatic switch-off function	•
Article number	45.016.22



# STATIONARY POWER TOOLS





## SLIDING MITRE SAWS



	<b>TE-SM 254 Dual</b> <b>EXPERT</b>	<b>TC-SM 254</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	2100 W S6 25%	1900 W S6 25%
Speed	4800 min <sup>-1</sup>	5000 min <sup>-1</sup>
Saw blade	Ø 254 x Ø 30 mm	Ø 254 x Ø 30 mm
Number of teeth	60	48
Swivelling range	-47° to +47°	-47° to +47°
Mitre cut	-45° to +45°	0° to 45° to the left
Max. cutting capacity at 90°	305 x 85 mm	305 x 85 mm
Product weight	15.2 kg	14.9 kg
Saw blade tilting	left / right	left
Laser	•	•
Dust funnel	•	•
Quick-adjust facility for the saw table	•	•
Quick-adjust facility for the tilt of the saw head	•	-
Precision TCT saw blade	1 pc	1 pc
Article number	43.008.75	43.003.85



4 006825 635744



4 006825 635713

## SLIDING MITRE SAWS



	<b>TC-SM 2131/1 Dual</b> <b>CLASSIC</b>	<b>TC-SM 216</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	1800 W S2 5 min	1600 W S6 25%
Speed	4900 min <sup>-1</sup>	5200 min <sup>-1</sup>
Saw blade	Ø 210 x Ø 30 mm	Ø 216 x Ø 30 mm
Number of teeth	48	48
Swivelling range	-47° to +47°	-47° to +47°
Mitre cut	-45° to +45°	0° to 45° to the left
Max. cutting capacity at 90°	310 x 62 mm	305 x 65 mm
Product weight	11.0 kg	12.7 kg
Saw blade tilting	left / right	left
Laser	•	•
Dust funnel	•	•
Quick-adjust facility for the saw table	-	•
Quick-adjust facility for the tilt of the saw head	-	-
Precision TCT saw blade	1 pc	1 pc
Article number	43.003.90	43.003.80



4 006825 644883



4 006825 635706

## MITRE SAWS



	<b>TC-MS 2112</b> <b>CLASSIC</b>	<b>TC-MS 216</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	1600 W S6 40%	1600 W S6 25%
Speed	5000 min <sup>-1</sup>	5000 min <sup>-1</sup>
Saw blade	Ø 210 x Ø 30 mm	Ø 216 x Ø 30 mm
Number of teeth	48	48
Swivelling range	-45° to +45°	-47° to +47°
Mitre cut	0° to 45° to the left	0° to 45° to the left
Max. cutting capacity at 90°	120 x 55 mm	120 x 60 mm
Product weight	7.1 kg	8.3 kg
Saw blade tilting	left	left
Laser	-	-
Dust funnel	-	•
Precision TCT saw blade	1 pc	1 pc
Article number	43.002.95	43.003.70



4 006825 584929



4 006825 635683

## TABLE SAWS WITH BASE FRAME



	<b>TE-CC 250 UF</b> <b>EXPERT</b>	<b>TC-TS 2225 U</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	2000 W S6 20%	2200 W S6 25%
Speed	4500 min <sup>-1</sup>	4250 min <sup>-1</sup>
Saw blade	Ø 250 x Ø 30 mm	Ø 254 x Ø 30 mm
Number of teeth	48	48
Mitre cut	0° to 45° to the left	0° to 45° to the left
Cutting height 90°	78 mm	80 mm
Cutting height 45°	53 mm	55 mm
Bench size	645 x 530 mm	580 x 555 mm
Max. support surface	865 x 795 mm	780 x 1055 mm
Product weight	34.9 kg	26.2 kg
Base frame	•	•
Table extension	right / rear	left / right / rear
Folding base frame	•	-
Format function	•	-
Soft start-up	•	•
Precision TCT saw blade	1 pc	1 pc
Parallel stop	•	•
Angle stop	•	•
Article number	43.405.39	43.405.15



4 006825 647518



4 006825 641349

## STATIONARY PLANER



	TC-SP 204 <b>CLASSIC</b>
Mains connection	230 - 240 V ~ 50 Hz
Rated input	1500 W
Speed	9000 min <sup>-1</sup>
Max. working width	204 mm
Max. removal	3 mm
Max. thickness opening	120 mm
Max. angle of the parallel stop	45°
Dust extraction connector	100 mm
Product weight	27.2 kg
Infeed table	•
Removable table	•
Accessories	2 planing blades
Push stick	•
Article number	44.199.55



## SCROLL SAW



	TC-SS 405 E <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Rated input	120 W S2 10 min
Stroke speed	400 - 1600 min <sup>-1</sup>
Stroke height	14 mm
Reach	406 mm
Mitre cut	0° to 45° to the left
Cutting height 90°	52 mm
Cutting height 45°	20 mm
Product weight	12.5 kg
Workpiece hold-down device	•
Blowing function	•
Adapter for coping saw blade	•
Dust extraction	•
Saw blade	2 pcs
Article number	43.090.40



## BAND SAWS



	TC-SB 305 U <b>CLASSIC</b>	TC-SB 200/1 <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	750 W	250 W S2 15 min
Blade speed	370 m/min   800 m/min	900 m/min
Reach	305 mm	200 mm
Dust extraction connector	Ø 70 mm / Ø 100 mm	Ø 36 mm
Mitre cut	0° to 45°	-2° to 45°
Cutting height 90°	170 mm	80 mm
Cutting height 45°	75 mm	45 mm
Product weight	64.6 kg	17.4 kg
Speed settings	2	1
Base frame	•	-
LED	-	-
Parallel stop	•	•
Angle stop	•	-
Article number	43.080.55	43.080.18



4 006825 608861



4 006825 617382

## WOODWORKING LATHE



	TC-WW 1000/1 <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Rated input	400 W S2 30 min
Speed 1	890 min <sup>-1</sup>
Speed 2	1260 min <sup>-1</sup>
Speed 3	1760 min <sup>-1</sup>
Speed 4	2600 min <sup>-1</sup>
Max. lathe diameter	280 mm
Tip width	1000 mm
Product weight	22.9 kg
V-belt drive which can be adjusted to 4 settings	•
Face plate	•
Tool support	•
Tailstock	•
Front end driver ring	•
Article number	43.121.10



4 006825 633924



## VACUUM EXTRACTION SYSTEM



	<b>TE-VE 550/1 A</b> <b>EXPERT</b>
Mains connection	220 - 240 V ~ 50-60 Hz
Rated input	550 W S1
Speed	2850 min <sup>-1</sup>
Debris bag volume	65 l
Air capacity	1150 m <sup>3</sup> /h
Vacuum	max. 1600 Pa
Hose length	2.5 m
Product weight	20.8 kg
Automatic socket	•
Handle	•
Chassis	•
Debris bag support	•
Quick release fastener for changing the debris bag	•
Induction motor	•
Catch basket	•
Multiadapter set	5-piece
Suction adapter	2x 36 mm to 100 mm
Article number	43.041.56



4 006825 648058

## WET AND DRY VACUUM CLEANER

**INCL.**  
NUMEROUS  
ACCESSORIES



	<b>TC-VC 1930 S</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50/60 Hz
Rated input	1500 W S1
Suction power	190 mbar
Tank	Stainless steel, 30 l
Suction hose length / diameter	250 cm / 36 mm
Cable length	300 cm
Product weight	4.8 kg
Cable holder	•
Blow connector	•
Accessory mount	•
Water drain screw	•
Suction tube	2-piece, plastic
Nozzles	Combination, crevice nozzle (1x each)
Filters	Foam filter, pleated filter (1x each)
Article number	23.421.88



4 006825 617559

## SILENT AIR COMPRESSOR



	<b>TE-AC 50 Silent</b> <b>EXPERT PLUS</b>
Mains connection	220 - 240 V ~ 50 Hz
Power rating	1500 W S1
Suction power	270 l/min
Output rate 0 bar   4 bar   7 bar	190 l/min   120 l/min   90 l/min
Tank capacity	50 l
Max. operating pressure	8 bar
Number of cylinders	4
Noise level (LpA)	54 dB(A)
Product weight	42.6 kg
Silent technology	•
Oil-free pump	•
Pressure reducer	•
Article number	40.206.20



## AIR TOOLS



	<b>Pro Compressed Air Set</b>
Items supplied	5-piece
Packaging	Colour box
Article number	41.327.20



## OIL-LUBRICATED COMPRESSOR



	<b>TC-AC 190/24/8</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz
Power rating	1500 W S2 15 min
Suction power	165 l/min
Output rate 0 bar   4 bar   7 bar	110 l/min   75 l/min   55 l/min
Tank capacity	24 l
Max. operating pressure	8 bar
Number of cylinders	1
Noise level	97 dB(A)
Product weight	20.8 kg
Pressure reducer	•
Article number	40.073.25



## OIL-FREE COMPRESSORS



	<b>TC-AC 240/50/10 OF</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Power rating	1500 W S3 25%
Suction power	240 l/min
Output rate 0 bar   4 bar   7 bar	173 l/min   107 l/min   76 l/min
Tank capacity	50 l
Max. operating pressure	10 bar
Number of cylinders	1
Noise level	97 dB(A)
Product weight	22.2 kg
Cable storage	-
Oil-free pump	•
Accessory storage	•
Pressure reducer	•
Compressed air hose	-
Blow-out pistol	-
Tyre pressure gauge	-
Adapter set	-
Article number	40.103.93



## OIL-FREE COMPRESSORS



	<b>TC-AC 190/6/8 OF</b> <b>CLASSIC</b>	<b>TC-AC 190 OF Set</b> <b>CLASSIC</b>	<b>TC-AC 190/8 OF Set</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Power rating	1100 W S3 25%	1100 W S3 15%	1100 W S3 15%
Suction power	185 l/min	190 l/min	190 l/min
Output rate 0 bar   4 bar   7 bar	139 l/min   77 l/min   60 l/min	165 l/min   83 l/min   55 l/min	165 l/min   83 l/min   55 l/min
Tank capacity	6 l	without pressure chamber	without pressure chamber
Max. operating pressure	8 bar	8 bar	8 bar
Number of cylinders	1	1	1
Noise level	97 dB(A)	97 dB(A)	97 dB(A)
Product weight	9.1 kg	5.0 kg	5.3 kg
Cable storage	•	•	•
Oil-free pump	•	•	•
Accessory storage	-	•	•
Pressure reducer	•	-	-
Compressed air hose	-	•	•
Blow-out pistol	-	•	•
Tyre pressure gauge	-	•	•
Adapter set	-	•	•
Article number	40.204.95	40.206.60	40.205.36



## TILE CUTTING MACHINES



	<b>TE-TC 620 U</b> <b>EXPERT</b>
Mains connection	230 V ~ 50 Hz
Rated input	900 W S2 30 min
Speed	2950 min <sup>-1</sup>
Cutting height 90°   45°	30 mm   25 mm
Cutting length	620 mm
Cutting wheel	Ø 200 x Ø 25.4 mm
Mitre cut	0° to 45° to the left
Product weight	34.4 kg
Water bath container	•
Transport wheels	•
Parallel stop	•
Angle stop	•
Article number	43.012.95



## TILE CUTTING MACHINES



	<b>TC-TC 800</b> <b>CLASSIC</b>	<b>TC-TC 618</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	800 W S2 10 min	600 W S2 10 min
Speed	2950 min <sup>-1</sup>	3000 min <sup>-1</sup>
Cutting height 90°   45°	34 mm   14 mm	35 mm   22 mm
Cutting length	-	-
Cutting wheel	Ø 180 x Ø 25.4 mm	Ø 180 x Ø 25.4 mm
Mitre cut	0° to 45° to the left	0° to 45° to the left
Product weight	8.6 kg	7.4 kg
Water bath container	•	•
Transport wheels	-	-
Parallel stop	•	•
Angle stop	•	-
Article number	43.011.85	43.011.80



**BENCH GRINDERS**

	<b>TC-BG 200 L</b> <b>CLASSIC</b>	<b>TC-BG 150</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	400 W S2 30 min	150 W S2 30 min
Speed	2980 min <sup>-1</sup>	2980 min <sup>-1</sup>
Grinding wheel diameter	200 mm	150 mm
Grinding wheel mount diameter	16 mm	12.7 mm
Wheel thickness	25 mm	16 mm
Grit size	36   60	36   60
Product weight	12.1 kg	6.0 kg
Adjustable speed	-	-
LED light	•	-
Toolless adjustable work support	•	•
Toolless adjustable spark guard windows	•	•
Flexible shaft	-	-
Accessories Set	-	-
Article number	44.126.33	44.126.32

**BENCH GRINDERS**

	<b>TC-XG 75 Kit</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz
Rated input	150 W   5 min
Speed	adjustable up to 9900 min <sup>-1</sup>
Grinding wheel diameter	75 mm
Grinding wheel mount diameter	10 mm
Wheel thickness	20 mm
Grit size	120   400
Product weight	2.4 kg
Adjustable speed	•
LED light	-
Toolless adjustable work support	•
Toolless adjustable spark guard windows	•
Flexible shaft	•
Accessories Set	•
Article number	44.125.59





## BELT-DISC SANDERS



	<b>TC-US 380</b> <b>CLASSIC</b>	<b>TC-US 350</b> <b>CLASSIC</b>
Mains connection	230 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	380 W S6 20%	350 W S2 30 min
Grinding wheel speed	1500 min <sup>-1</sup>	2980 min <sup>-1</sup>
Belt speed	292 m/min	900 m/min
Grinding wheel	Ø 150 mm	Ø 150 x Ø 12.7 x 20 mm
Sanding/grinding belt	100 x 914 mm	50 x 686 mm
Swivelling range	-60° to 60°	-
Grit size	80   80	36   80
Product weight	11.5 kg	8.3 kg
Spark protection glass	-	•
Rubber feet for low vibration	•	•
Adjustable work support	•	•
Dust extraction	•	-
Tilting aluminium table	•	-
Cross stop	•	-
Sanding/grinding belt	•	•
Grinding/sanding wheel made of quality corundum	-	•
Grinding/sanding disc incl. grinding/sanding wheel	•	-
Article number	44.192.57	44.661.54



4 006825 649987



4 006825 649956

## STATIONARY GRINDER



	<b>TH-US 240</b> <b>CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Rated input	240 W S2 30 min
Speed	2950 min <sup>-1</sup>
Belt speed	900 m/min
Grinding wheel	Ø 150 mm
Sanding/grinding belt	50 x 686 mm
Swivelling range	-
Product weight	7.2 kg
Rubber feet for low vibration	•
Adjustable work support	•
Dust extraction	-
Tilting aluminium table	-
Cross stop	-
Sanding/grinding belt	•
Sanding/grinding disc	•
Article number	44.661.50



4 006825 595789

## METAL CUTTING SAW



	<b>TC-MC 355</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz
Rated input	2300 W
Cutting wheel	Ø 355 x Ø 25.4 x 3.2 mm
Speed	4000 min <sup>-1</sup>
Mitre cut	-15° to +45°
Max. saw width at 90°, rectangular profile	100 x 100 mm
Max. saw width at 90°, round profile	Ø 100 mm
Max. clamping range	230 mm
Bench size	460 x 260 mm
Product weight	15.0 kg
Soft start-up	•
Height stop	•
Blade lock	•
Clamping mechanism with quick-release lock	•
Transport brace	•
Article number	45.031.35



4 006825 619966

## BENCH DRILLS



	<b>TE-BD 750 E</b> <b>EXPERT</b>	<b>TC-BD 450</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	750 W S2 15 min	450 W S6 20%
Speed	450 - 2500 min <sup>-1</sup>	600 - 2650 min <sup>-1</sup>
Number of speed settings	Continuously	5
Max. drilling depth	80 mm	50 mm
Reach	152 mm	104 mm
Drill diameter	1 - 16 mm	1.5 - 13 mm
Drill table tiltable	-45° to +45°	-45° to +45°
Drill table size	243 x 243 mm	160 x 160 mm
Base dimensions	304 x 456 mm	190 x 295 mm
Machine height	955 mm	600 mm
Product weight	44.4 kg	14.3 kg
LED light	•	-
LCD speedometer	•	-
Quick-action chuck	•	-
Table extension	•	-
Drill chuck mount	B16	B16
MK2 chuck	•	-
Article number	42.507.15	45.205.92



4 006825 617771



4 006825 649871

## ELECTRIC HOISTS



	<b>TC-EH 600</b> <b>CLASSIC</b>	<b>TC-EH 250</b> <b>CLASSIC</b>
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1050 W S3 20%	450 W S3 20%
Lifting height without return pulley	18 m	11.5 m
Lifting height with return pulley	9 m	5.7 m
Payload without return pulley	300 kg	125 kg
Payload with return pulley	600 kg	250 kg
Hoisting speed without return pulley	8 m/min	8 m/min
Hoisting speed with return pulley	4 m/min	4 m/min
Product weight	16.8 kg	10.0 kg
Thermo switch	•	•
Automatic brake	•	•
Automatic limit cut-out	•	•
Twist-free wire cable	•	•
Operator switch with emergency stop function	•	•
Guide roller with load hook	•	•
Double clamps for mounting	•	•
Article number	22.551.50	22.551.30



## CHAIN HOIST



	<b>TC-CH 1000</b> <b>CLASSIC</b>
Max payload	1000 kg
Max. lifting height	2.5 m
Product weight	8.5 kg
Load hook with safety catch	•
Closed metal housing	•
Article number	22.501.10



## ANALOG BATTERY CHARGER



	<b>CC-BC 15</b> <b>CAR CLASSIC</b>
Mains connection	230 V ~ 50 Hz
Charging voltage	6 V / 12 V / 24 V
Suitable for batteries (min. / max. Ah)	10 - 300 Ah
Charging current (eff.) on 6 V	min. 6.5 A / max. 15 A
Charging current (eff.) on 12 V	min. 8 A / max. 15 A
Charging current (eff.) on 24 V	min. 7 A / max. 10 A
Product weight	5.3 kg
Overload / false poling / short-circuit protection	•
Suitable for lead-acid batteries	•
Built-in ammeter	•
All-insulated construction	•
Totally insulated battery terminals	•
Carry handle	•
Article number	10.750.31



## JUMP START - POWER BANK



	<b>CE-JS 18/1</b> <b>CAR EXPERT</b>
Capacity	3 x 6000 mAh (66.6 Wh)
Start voltage	12 V
Start current / peak current	300 A / 600 A
USB outlet	5 V / 2 A und 3 A
Consumption outlet	12 V   10 A / 19 V   3.5 A
For petrol engines up to	8000 cm <sup>3</sup>
For diesel engines up to	5000 cm <sup>3</sup>
Charging time	6 h
Product weight	0.7 kg
Jump start function and power bank	•
Jump start cable	•
LED charge status indicator	•
LED work light	•
Charging function for cell phone / tablet PC / camera	•
Charging function for notebook / laptop	•
USB adapter cable (Micro/Mini USB)	•
Adapter cable with 9 notebook adapters	•
230 V charging adapter	•
Storage case	•
Article number	10.915.31



## CAR AIR COMPRESSOR




	<b>CC-AC 35/10 12 V</b> <b>CAR CLASSIC</b>
Mains voltage	12 V
Max. operating pressure	10 bar
Pressure hose length	1500 mm
Product weight	2.0 kg
Pressure gauge	0 - 10 bar
Extra long connection cable	2.8 m
Valve connection for car tyre valves	Schrader valve
Spare adapters (incl.)	4 pcs (bike, water ball, air bed, ball adapter)
Article number	20.721.21




## ACCESSORIES – HANDHELD POWER TOOLS


### ANGLE GRINDERS ACCESSORIES

	Type	Article number	EAN	Mount	Packaging
	Quick Fix Nut	49717705	4 009317 177050	M14	Colour box

### BISCUIT JOINTERS ACCESSORY

	Type	Article number	EAN	Ø	Ø hole	Cutting width	Number of teeth
	TCT Cutter Blade	49758941	4 009317 589419	100 mm	22 mm	3.8 mm	6


### PLANERS ACCESSORIES

	Type	Article number	EAN	Items supplied	Length	Material	Packaging
	Blade Set	49568315	4 009315 683157	2 reversible blades	82 mm	Hard metal	Colour box


### CIRCULAR SAWS ACCESSORIES

	Type	Article number	EAN	Ø	Cutting width / blade thickness	Ø hole	Number of teeth
	TCT Saw Blade for Woodworking	49584759	4 009315 847597	165 mm	1.6 mm / 1.0 mm	Ø 20 mm	24
	TCT Saw Blade for Woodworking	49586956	4 009315 869568	190 mm	2.0 mm / 1.4 mm	Ø 30 mm	30


### MINI CIRCULAR SAWS ACCESSORY

	Type	Article number	EAN	Ø	Ø hole	Number of teeth	Rim shape diamond cutting wheel
	Saw Blades Set	49575915	4 009315 759159	89 mm	10 mm	74 (HSS) / 36 (TCT)	Continuous rim

### ALL PURPOSE SAWS ACCESSORIES

	Type	Article number	EAN	Set comprising
	All Purpose Saw Blades Set 3-piece Akku-Top	49576105	4 009315 761053	Saw blades (1 of each) for wood (fine cut), wood (rough cut), metal/plastics/wood with metal remains/bi-metal

### ORBITAL SANDERS ACCESSORY


	Type	Article number	EAN	Abrasive paper size	Items supplied	Grit size	With holes	Can be used for
	Abrasive Paper Set	49818975	4 009318 189755	230 x 115 mm	15 pcs	40 / 80 / 120 grit (5 of each)	•	Wood and metal




### BAND SANDERS ACCESSORIES

	Type	Article number	EAN	Abrasive paper size	Items supplied	Grit size	Can be used for
	Grinding Belt Set	49912575	4 009319 125752	75 x 533 mm	5 pcs	2x 40 grit, 2x 80 grit, 1x 120 grit	Wood and metal


### DELTA SANDERS ACCESSORY

	Type	Article number	EAN	Abrasive paper size	Items supplied	Grit size	With holes	Can be used for
	Abrasive Paper Set	49492874	4 009314 928747	93 x 93 x 93 mm	20 pcs	8x 60 grit, 6x 120 grit, 6x 180 grit	•	Wood and metal

### MULTI SANDERS ACCESSORY

	Type	Article number	EAN	Abrasive paper size	Items supplied	Grit size	With holes	Can be used for
	Abrasive Paper Set	49496174	4 009314 961744	150 x 150 x 150 mm	15 pcs	60 / 120 / 180 grit (5 of each)	•	Wood and metal


### ROTATING SANDERS ACCESSORY

	Type	Article number	EAN	Abrasive paper size	Items supplied	Grit size	With holes	Can be used for
	Abrasive Paper Set	49491974	4 009314 919745	125 mm	25 pcs	9x 60 grit, 8x 120 grit, 8x 180 grit	•	Wood and metal


### CORDLESS POLISHING/SANDING MACHINES ACCESSORY

	Type	Article number	EAN	Can be used for	Set comprising
	Polishing/Grinding Set 180 mm	20.932.33	4 006825 551846	CE-CP 18/180 Li E	2x synthetic bonnet, 1x foam pad, 6x abrasive paper (60 / 80 / 120 grit, 2 of each)


### POWER X-CHANGE TACKERS ACCESSORIES




	Type	Article number	EAN	Type	Length	Width	Quantity	Suitable for
	Staples	41.378.75	4 006825 658385	E	19 mm	5.7 mm	3000 pcs	TE-CN 18 Li
	Nails	41.378.74	4 006825 658378	J	32 mm	1.0 mm	3000 pcs	TE-CN 18 Li


### HOT AIR GUNS ACCESSORIES



	Type	Article number	EAN	Ø	Length	Quantity
	Glue Sticks	49539355	4 009315 393551	11 mm	200 mm	24 pcs



## ACCESSORIES – STATIONARY TOOLS

STATIONARY PLANERS ACCESSORIES								
	Type	Article number	EAN	Can be used for	Length	Height	Thickness	Quantity
	Spare Blades	49568602	4 009315 686028	TH-SP 204, TC-SP 204	210 mm	17.2 mm	1.5 mm	2 pcs


MITRE SAWS AND TABLE SAWS ACCESSORIES							
	Type	Article number	EAN	Ø	Ø hole	Cutting width / blade thickness	Number of teeth
	TCT Thin Cutting Saw Blade	49589361	4 009315 893617	254 mm	30 mm	1.8 mm / 1.2 mm	42
	TCT Saw Blade	49587861	4 009315 878614	210 mm	30 mm	2.4 mm / 1.6 mm	48
	TCT Saw Blade	49588251	4 009315 882512	216 mm	30 mm	2.4 mm / 1.6 mm	48

WOODWORKING LATHES ACCESSORIES							
	Type	Article number	EAN	Mount	Gripping diameter outer jaws	Gripping diameter inner jaws	Product weight
	Four-Jaw Chuck	49455295	4 009314 552959	Inner thread M18	45 - 134 mm	18 - 52 mm	2.5 kg

CORDLESS WET AND DRY VACUUM CLEANERS / WET AND DRY VACUUM CLEANERS ACCESSORIES							
	Type	Article number	EAN	For tank volume	Items supplied	Suitable for	
	Foam Filters	23.511.32	4 006825 644098	–	5 pcs	TC-VC 18/20 Li S TC-VC 1930 S	
	Dirt Bags 30 l	23.511.70	4 006825 528763	30 l	5 pcs	TC-VC 1930 S	

CORDLESS WET AND DRY VACUUM CLEANERS / WET AND DRY VACUUM CLEANERS ACCESSORIES						
	Type	Article number	EAN	Items supplied	Suitable for	
	Pleated Filter with Lid	23.511.13	4 006825 566512	1 pc	TC-VC 18/20 Li S TC-VC 1930 S	
	Universal Floor Nozzle	23.512.15	4 006825 630060	1 pc	TC-VC 18/20 Li S TE-VC 18/10 Li	

**WET AND DRY VACUUM CLEANERS ACCESSORY**

	Type	Article number	EAN	Items supplied	Suction hose length	Suction hose diameter	Suitable for
	Suction Hose	23.620.00	4 006825 543018	1 hose, 3 adapters	300 cm	36 mm	TC-VC 18/20 Li S TE-VC 18/10 Li TC-VC 1930 S



**TILE CUTTING MACHINES ACCESSORIES**

	Type	Article number	EAN	Ø	Ø hole	Rim shape
	Diamond Cutting Wheel	49795850	4 009317 958505	180 mm	25.4 mm	Continuous rim
	Diamond Cutting Wheel	49795855	4 009317 958550	200 mm	25.4 mm	Continuous rim

**BENCH GRINDERS ACCESSORIES**

	Type	Article number	EAN	Ø	Ø hole	Wheel thickness	Grit size	Reducing rings
	Polishing Wheel	49507045	4 009315 070452	75 mm	10 mm	20 mm	400	–
	Grinding Wheel	49507125	4 009315 071251	75 mm	10 mm	20 mm	120	–
	Grinding Wheel	49507465	4 009315 074658	150 mm	32 mm	16 mm	60	12.7 mm
	Grinding Wheel	49507435	4 009315 074351	150 mm	32 mm	16 mm	36	12.7 mm
	Grinding Wheel	49507765	4 009315 077659	200 mm	32 mm	25 mm	60	16 mm
	Grinding Wheel	49507735	4 009315 077352	200 mm	32 mm	25 mm	36	16 mm

**BELT-DISC SANDERS ACCESSORIES**

	Type	Article number	EAN	Dimensions	Quantity	Grit size
	Grinding Belt Set	49914605	4 009319 146054	914 x 100 mm	3 pcs	60 grit, 80 grit, 120 grit – 1 of each
	Grinding Belt Set	49910805	4 009319 108052	686 x 50 mm	5 pcs	2x 60 grit, 2x 80 grit, 1x 120 grit

# POWER TOOLS

## 2022/23

Is there anything you'd like to ask us about our products?  
Would you like to order a part?  
Your product isn't working as it should?  
We're at your service!  
We'll get you some help – fast and without any fuss.



**Lawn Star**  
P.O. Box 496  
Parrow  
7499  
Cape Town



+27-21-5355249



+27-21-5354624



[www.lawnstar.co.za](http://www.lawnstar.co.za)



[sales@lawnstar.co.za](mailto:sales@lawnstar.co.za)

**Lawn Star**  
4 Bofors Two  
98 Bofors Circle  
Epping 2  
7460  
Cape Town  
South Africa